


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

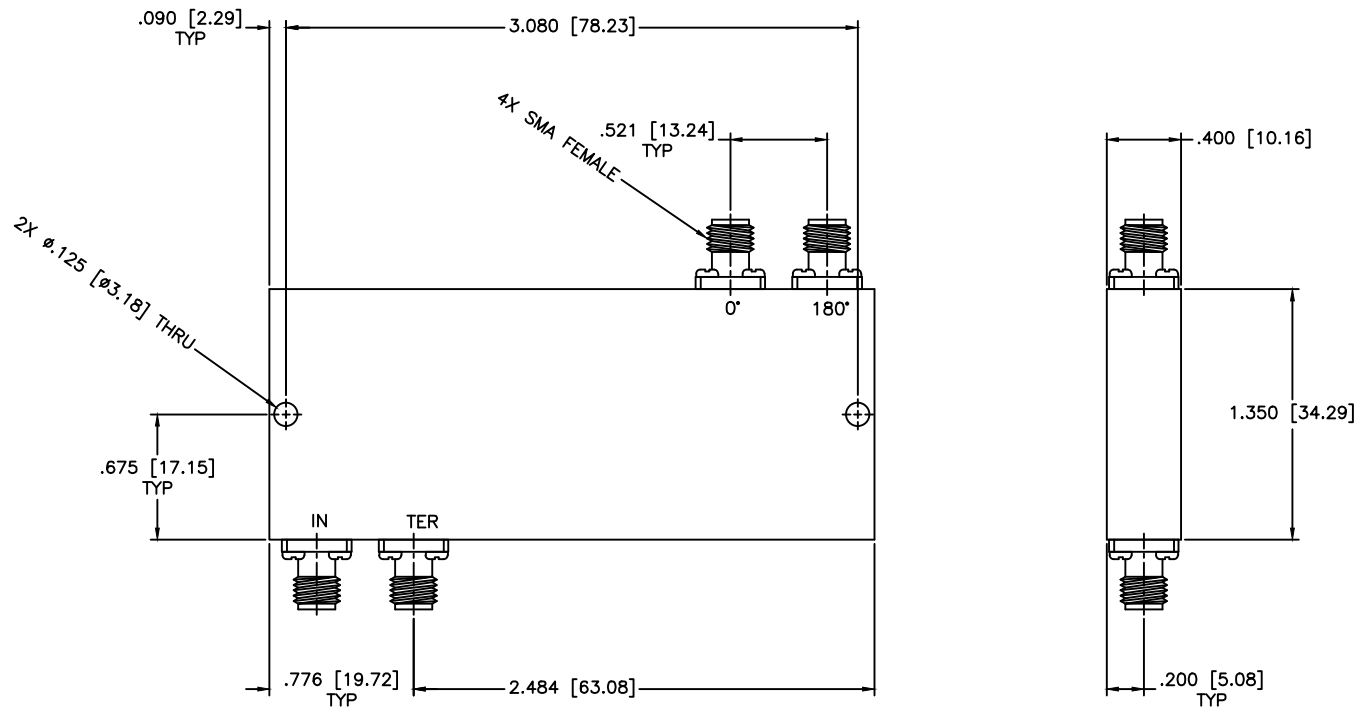

SPECIFICATIONS

- Frequency Range: 2–8 GHz
- Coupling: 3dB Typ.
- Isolation: 18dB Min.
- VSWR: 1.40:1 Max.
- Insertion Loss: 1.5dB Max.
- Frequency Sensitivity: ±0.75dB
- Power: 20W

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE: 180° HYBRID		SHEET: N/A
DRAWN: Paiboon Luekhamhan	DATE: 08-29-2001	PART NO. HJ-19		DWG NO. 81832	
APPROVED: T. Nguyen	DATE: 08-29-2001	CAGE CODE: OD2L5	SIZE: A	REV: N/A	DO NOT SCALE THE DRAWING

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION