


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

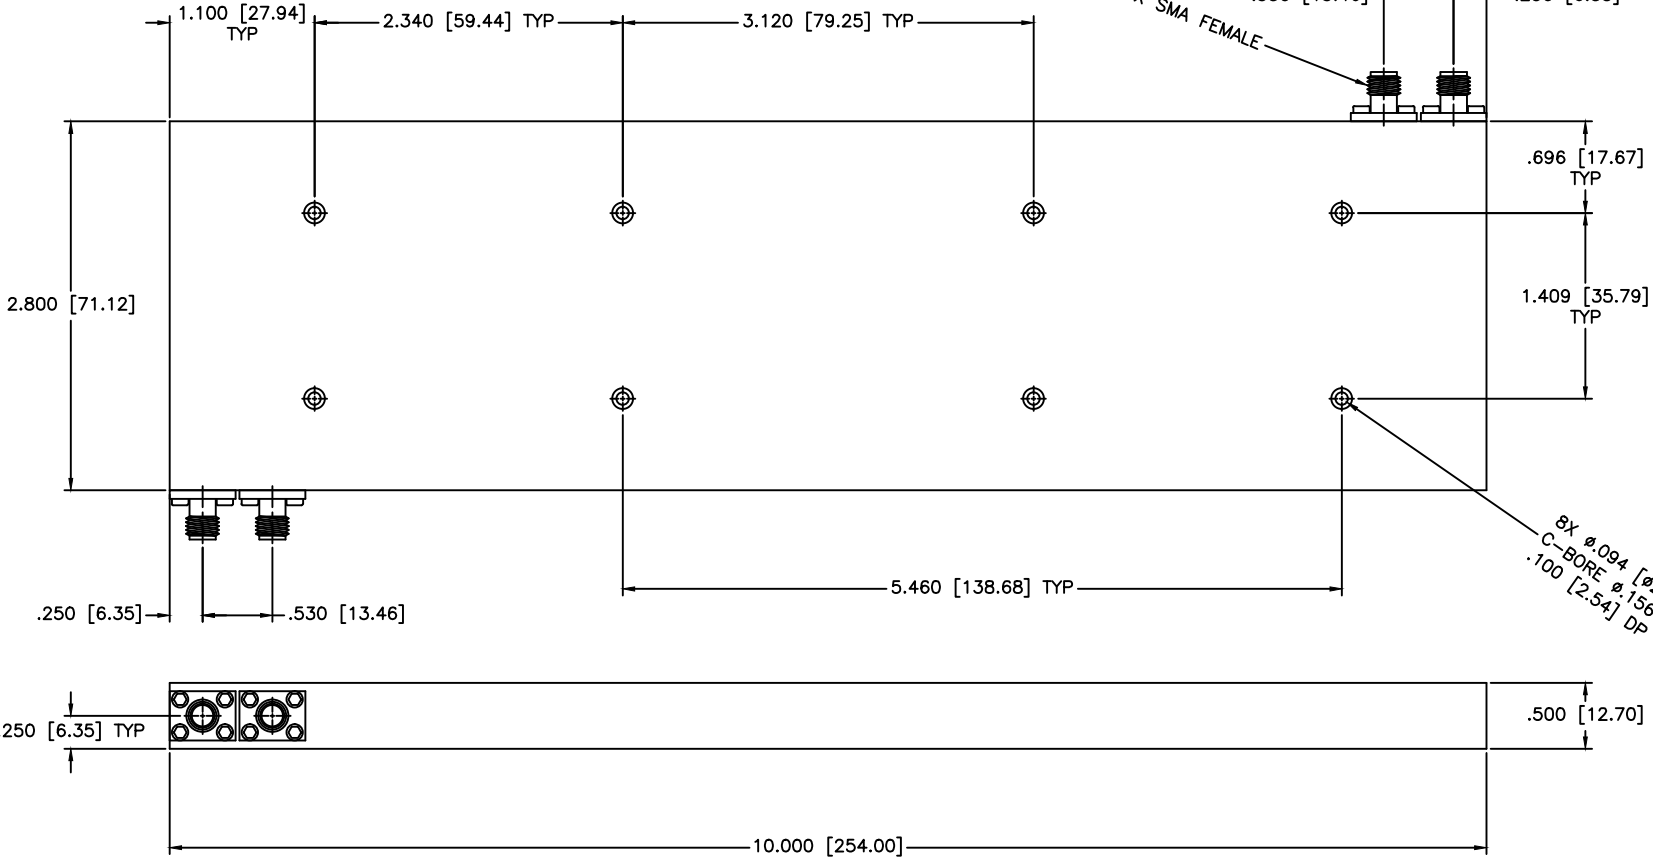

SPECIFICATIONS

Frequency Range: 0.5–2.5 GHz
 Isolation: 20dB Min.
 VSWR: 1.40:1 Max.
 Insertion Loss: 2.0dB Max.
 Phase Balance: ± 5 Deg. Max.
 Amplitude Balance: ± 0.7 Max.

DRAWN: Paboon Luethamhan	DATE: 07-20-2008	MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8534 FAX: (727) 381-8118 HTTP://WWW.MCLI.COM	SCALE: N/A
	DATE: 07-20-2008		SHEET: N/A
APPROVED: T. Nguyen		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^\circ$	DRAWING TITLE: 180° HYBRID
		PART NO.: HJ-24	
		DATE CODE: 0D2L5	REV: N/A
		SIZE: N/A	REV: N/A
		DO NOT SCALE THE DRAWING	DWG NO.: 82609