


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

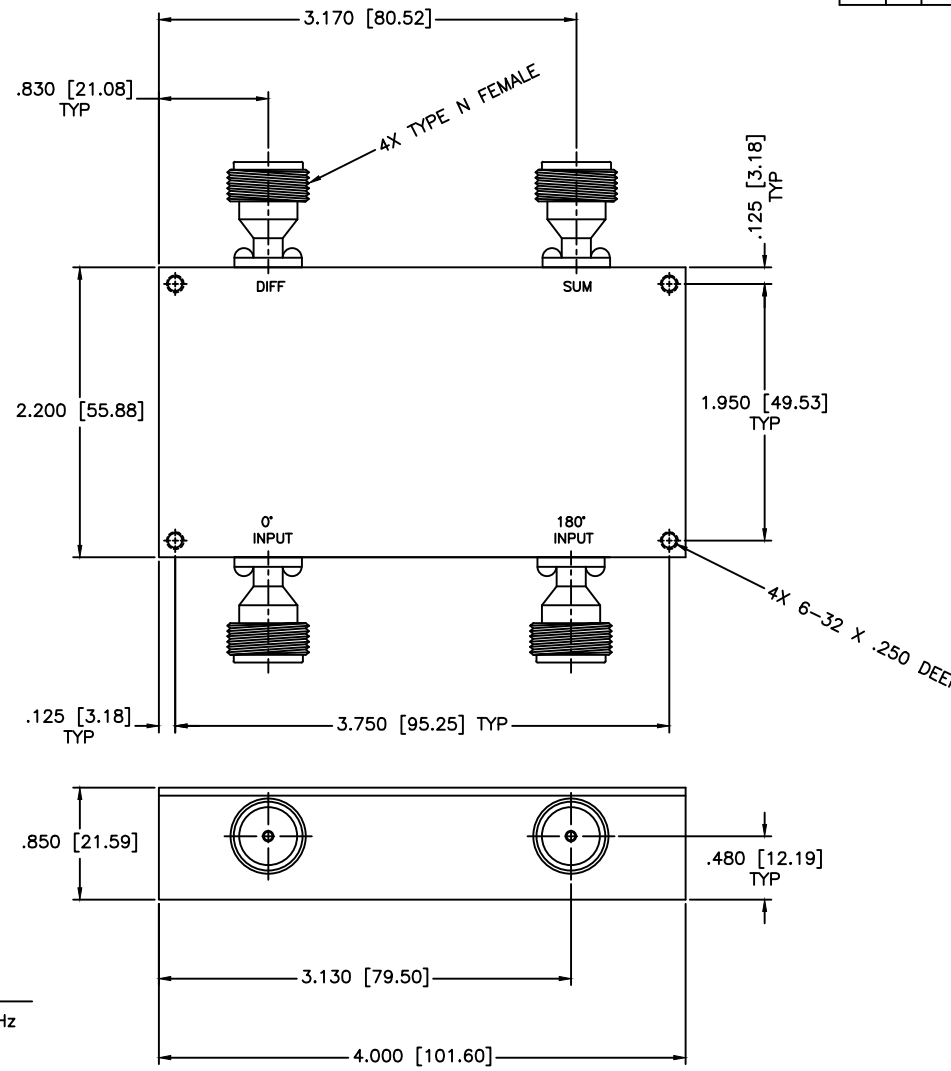

SPECIFICATIONS

- Frequency Range: 500–2500 MHz
- Isolation: 20dB Min.
- VSWR: 1.35:1 Max.
- Insertion Loss: 0.45dB Max.
- Phase Balance: 180±8 Deg. Max.
- Amplitude Balance: 0.4dB Max.
- Power Handling: 200W CW

MATERIAL	DRAWING TITLE	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6534 FAX: (727) 381-8118 WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± 0.01 ± 0.005 ANGLE: ± 1/2°		SHEETS: N/A
DRAWN: Paloon Luekhamhan	DATE: 03-21-2013	PART NO. HJ-58/NF		
APPROVED: T. Nguyen	DATE: 03-21-2013	CAGE CODE: OD2L5	SIZE: N/A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 86242