


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

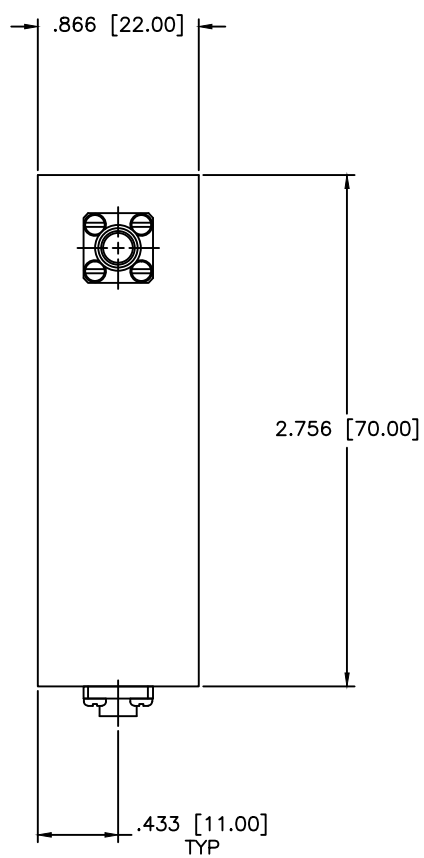

SPECIFICATIONS

Frequency Range: 0.9–1.7 GHz
 Isolation: 17dB Min.
 Insertion loss: 0.50dB Max.
 VSWR: 1.35:1 Max.
 Operating Temp: 25°C

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 07-01-2008
APPROVED: T. Nguyen	DATE: 07-01-2008

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
	SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: ISOLATOR, 1WATT	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.: IS-1	
THIRD ANGLE PROJECTION	CAGE CODE:	OD2L5
	SIZE:	N/A
	REV:	N/A
	DWG NO.:	82107
DO NOT SCALE THE DRAWING		