


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

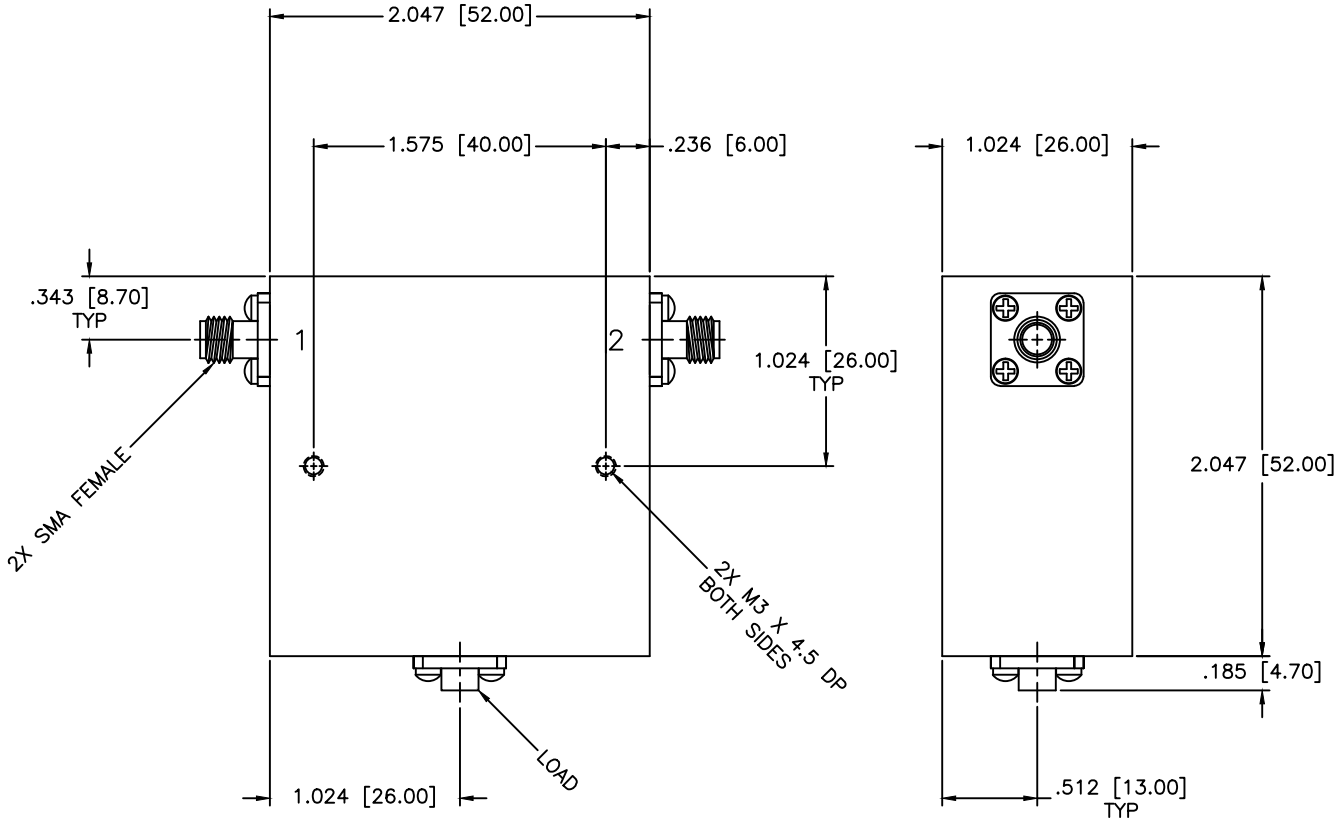

SPECIFICATIONS

Frequency Range: 0.5–0.7 GHz
 Isolation: 15dB Min.
 Insertion loss: 0.85dB Max.
 VSWR: 1.50:1 Max.
 Operating Temperature: 0°C to +50°C
 Forward Power: 1 Watt

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 11-19-2013
APPROVED: T. Nguyen	DATE: 11-19-2013

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.02 ±.008
 ANGLE: ±1/2°

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

SCALE:	N/A		
SHEET:	N/A		
DRAWING TITLE:	COAXIAL ISOLATOR		
PART NO.:	IS-108		
CAGE CODE:	SIZE: A	REV: A	DWG. NO. 84329
OD2L5	DO NOT SCALE THE DRAWING		