


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

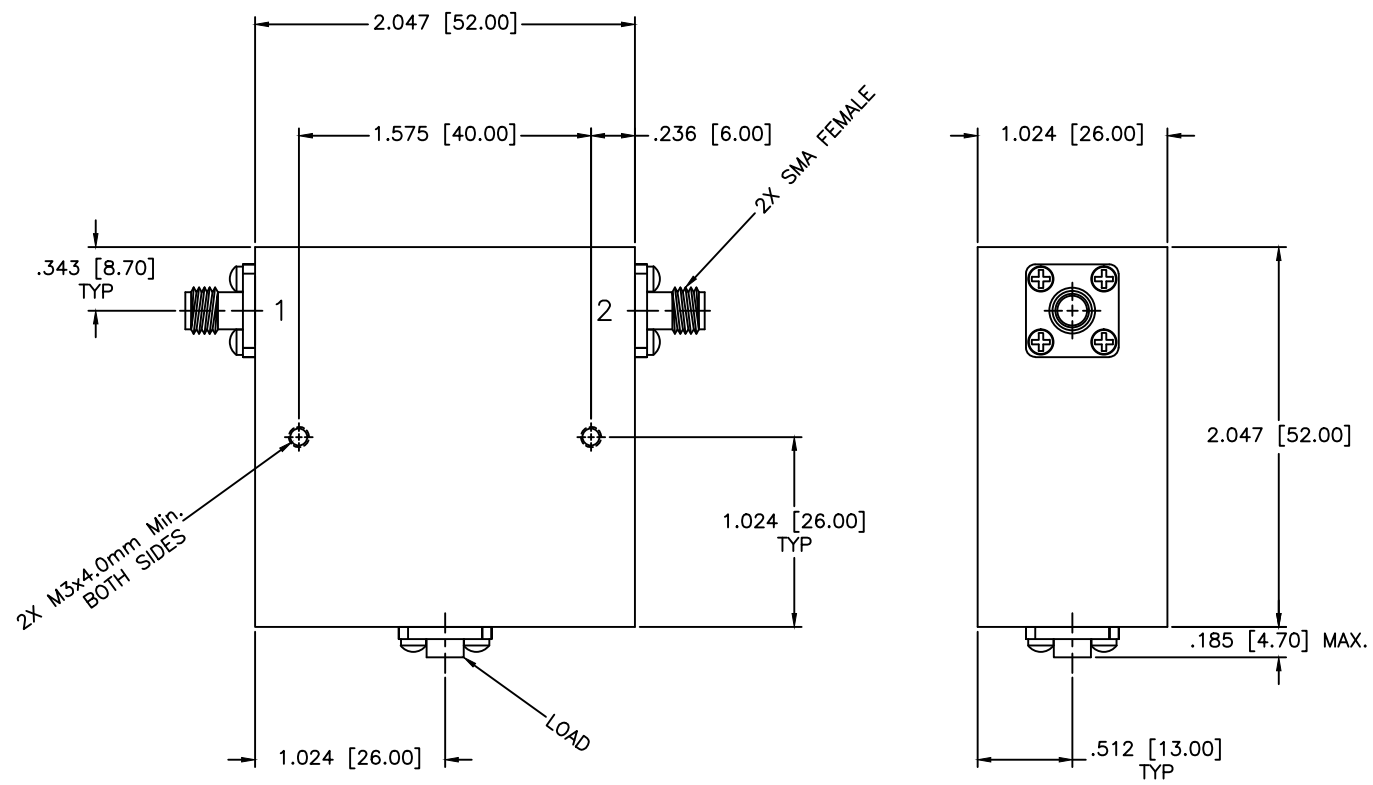

SPECIFICATIONS

Frequency Range: 0.60–0.80 GHz
 Isolation: 16dB Min.
 Insertion loss: 0.70dB Max.
 VSWR: 1.40:1 Max.
 Operating Temperature: 0°C to +50°C
 Power: 1W Avg.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			SHEET: N/A
DRAWN: Paiboon Luekhamhan		DRAWING TITLE: COAXIAL ISOLATOR	
DATE: 03-17-2009		PART NO. IS-109	
APPROVED: T. Nguyen		CAGE CODE: OD2L5	SIZE: A
DATE: 03-17-2009		REV: N/A	DWG NO. 84330
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING	

