


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

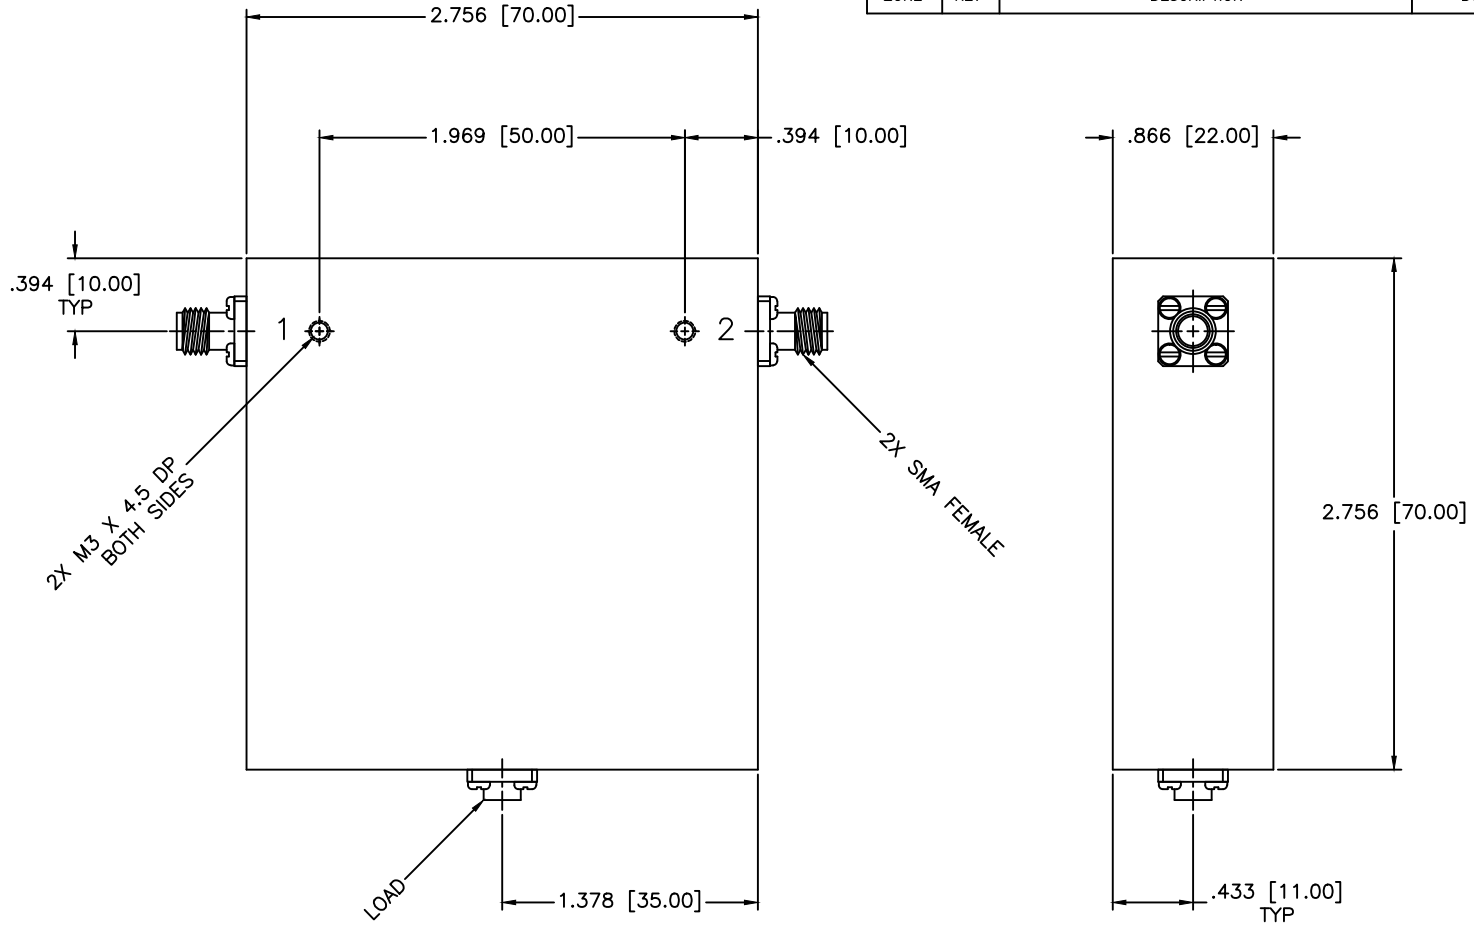

**SPECIFICATIONS**

Frequency Range: 1–3 GHz  
 Isolation: 15dB Min.  
 Insertion loss: 0.90dB Max.  
 VSWR: 1.45:1 Max.  
 Forward Power: 10 Watt  
 Operating Temperature: +25°C±5°C

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://www.mcli.com">http://www.mcli.com</a>	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>COAXIAL ISOLATOR</b>	
DRAWN: Paiboon Luekhamhan		PART NO.: IS-131	
DATE: 04-09-2019		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		DATE: 04-09-2019	
THIRD ANGLE PROJECTION		SIZE: A REV: A DWG NO. 85082	
		DO NOT SCALE THE DRAWING	