


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

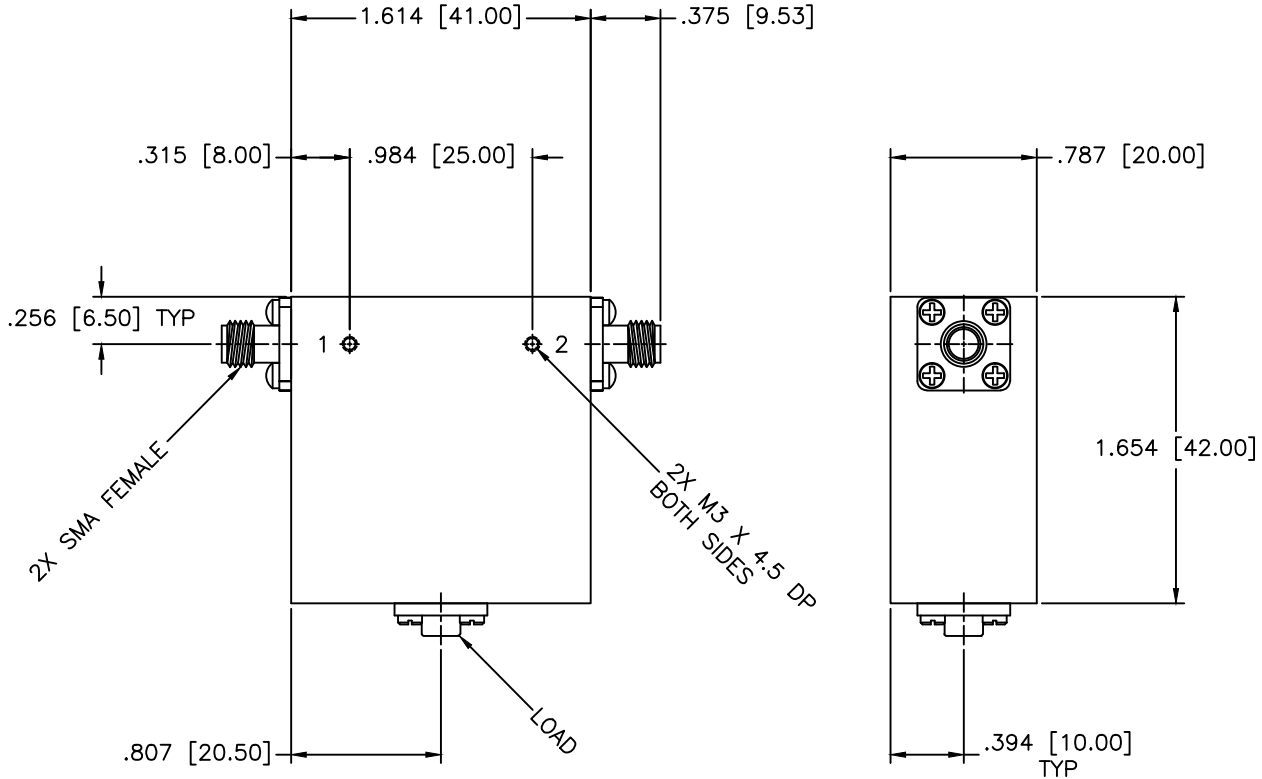

SPECIFICATIONS

Frequency Range: 2.4–2.5 GHz
 Isolation: 20dB Typ.
 Insertion loss: 0.50 dB Max.
 VSWR: 1.35:1 Max.
 Operating Temperature: -30°C TO +70°C

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:		
		ISOLATOR		
DRAWN:		PART NO.		
Paiboon Luekhamhan		IS-164		
DATE:	09-29-2011	CAGE CODE:	SIZE:	REV:
APPROVED:	T. Nguyen		0D2L5	A
DATE:		DWG NO.		
09-29-2011		85900		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING		
THIRD ANGLE PROJECTION 				