


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

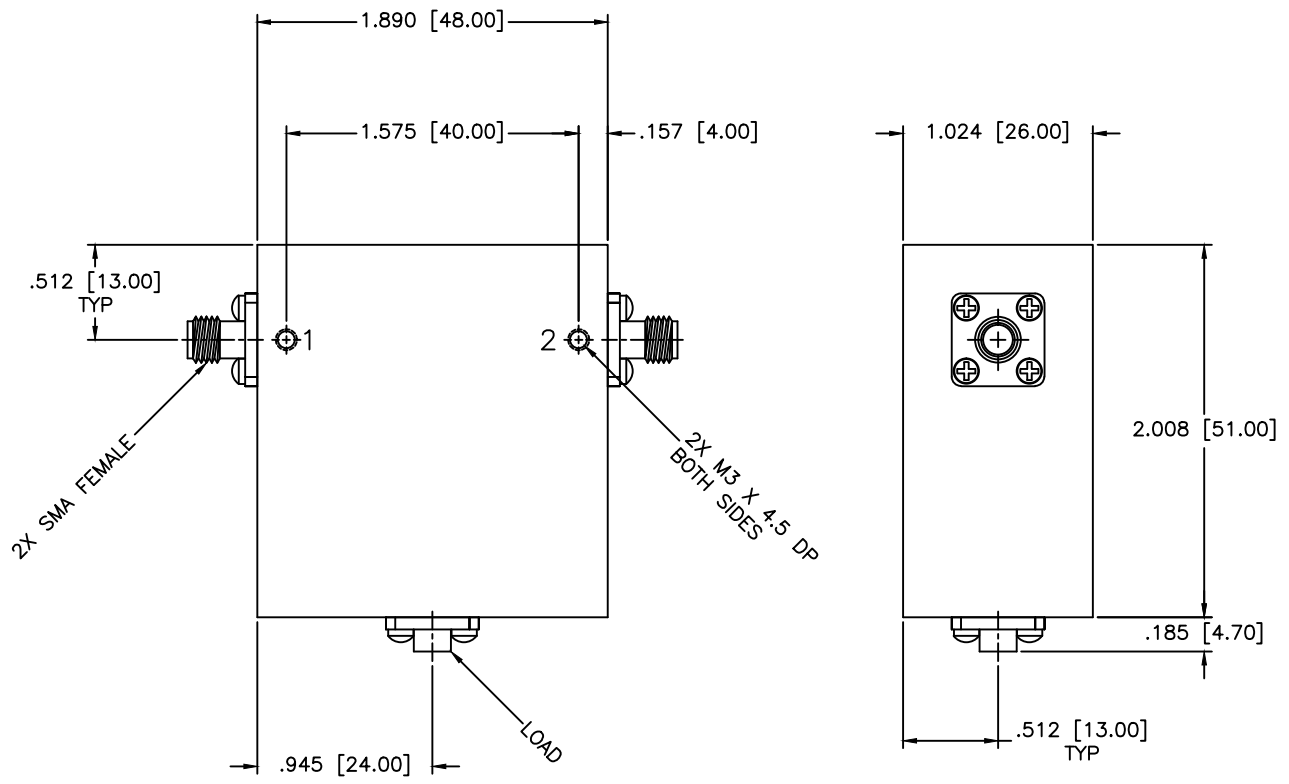

SPECIFICATIONS

Frequency Center (FC): 400.5 MHz
 Isolation: 20dB Min.
 Insertion loss: 0.30dB Max.
 VSWR: 1.25:1 Max.
 Operating Temperature: 0°C to +55°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± N/A DECIMALS: ±.05 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL ISOLATOR	
DRAWN: Paiboon Luekhamhan DATE: 11-15-2011		PART NO.: IS-172	
APPROVED: T. Nguyen DATE: 11-15-2011		CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO. 85928
<small>PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>		DO NOT SCALE THE DRAWING	