


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

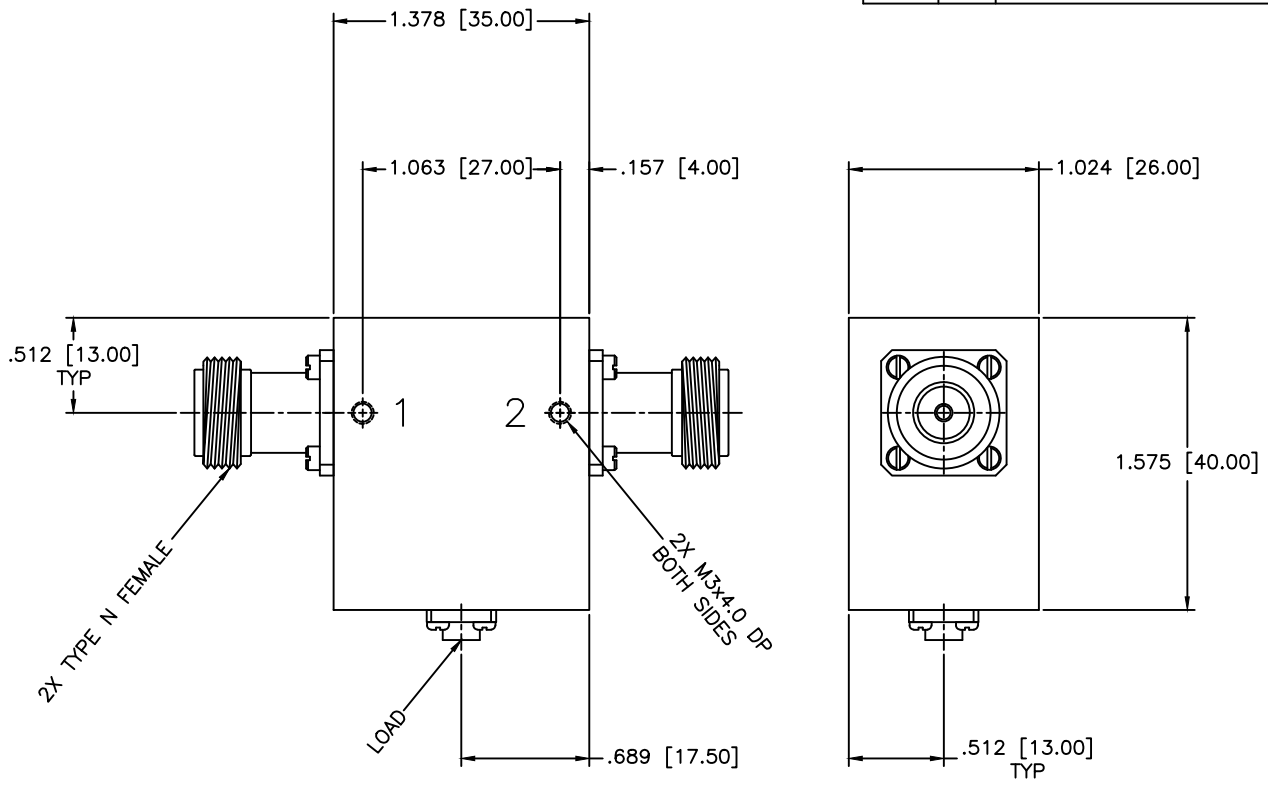

SPECIFICATIONS

Frequency Range: 890–950 MHz
 VSWR: 1.25:1 Max.
 Insertion Loss: 0.30dB Max.
 Isolation: 20dB Min.
 Operating Temperature: –30°C to +70°C

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: COAXIAL ISOLATOR	
		PROPERTY NOTICE: THE INFORMATION ON THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.: IS-184/NF	
DRAWN:	DATE:	THIRD ANGLE PROJECTION	CAGE CODE:	DWG NO.:
Paiboon Luekhamhan	11-21-2013		OD2L5	86424
APPROVED:	DATE:	SIZE:	REV:	
T. Nguyen	11-21-2013	A	N/A	
DO NOT SCALE THE DRAWING				