


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

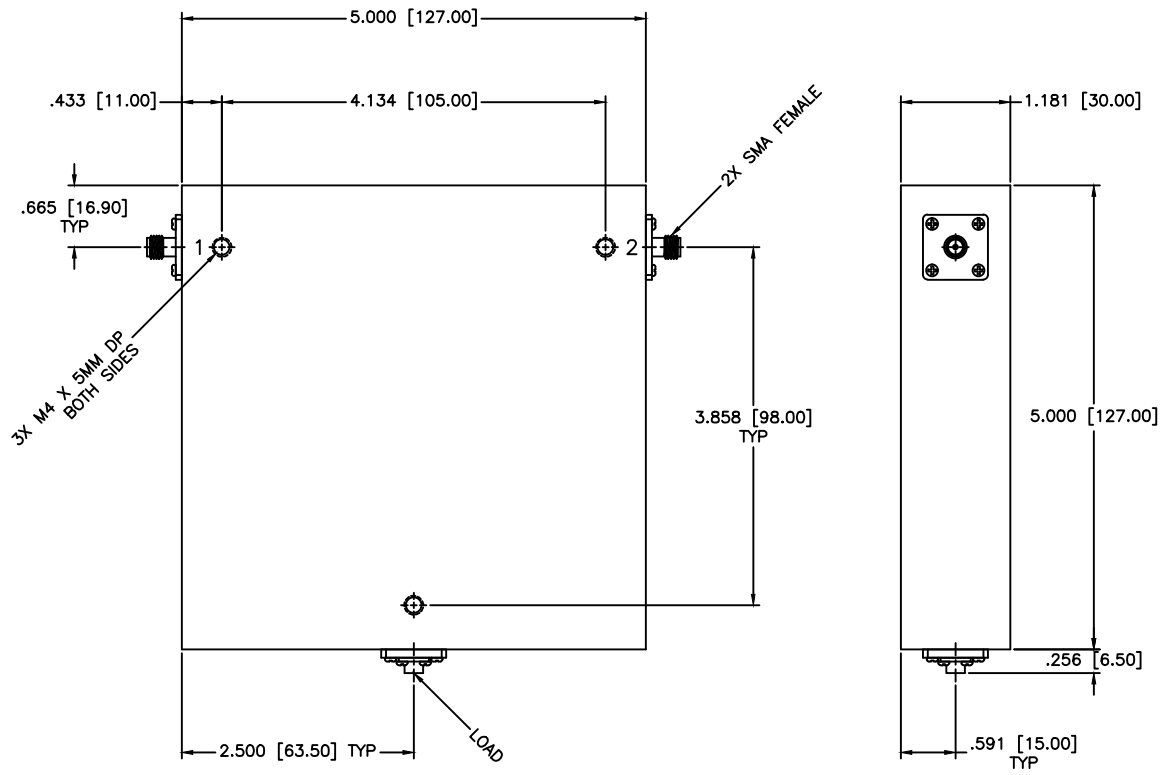

SPECIFICATIONS

Frequency Range: 600–900 MHz
 Isolation: 20dB Min.
 Insertion loss: 0.5dB Max.
 VSWR: 1.20:1 Max.
 Operating Temperature: +10°C to +40°C
 Power: 1W Avg, 100W Peak.

DRAWING: Paboon Luethamhan APPROVED: T. Nguyen DATE: 01-16-2013 DATE: 01-16-2013	MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7230 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8284 FAX: (727) 381-8118 WWW.MCLI.COM	BOLD: N/A SHEET: N/A
		PART NO.: IS-192 CAGE CODE: 002L5 REVISION: C DRAWING NO.: 86202
UNLESS OTHERWISE SPECIFIED: TOLERANCES: IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLES: ±1/2°		DRAWING TITLE: COAXIAL ISOLATOR PART NO.: IS-192 CAGE CODE: 002L5 REVISION: C DRAWING NO.: 86202
DO NOT SCALE THE DRAWING		