


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

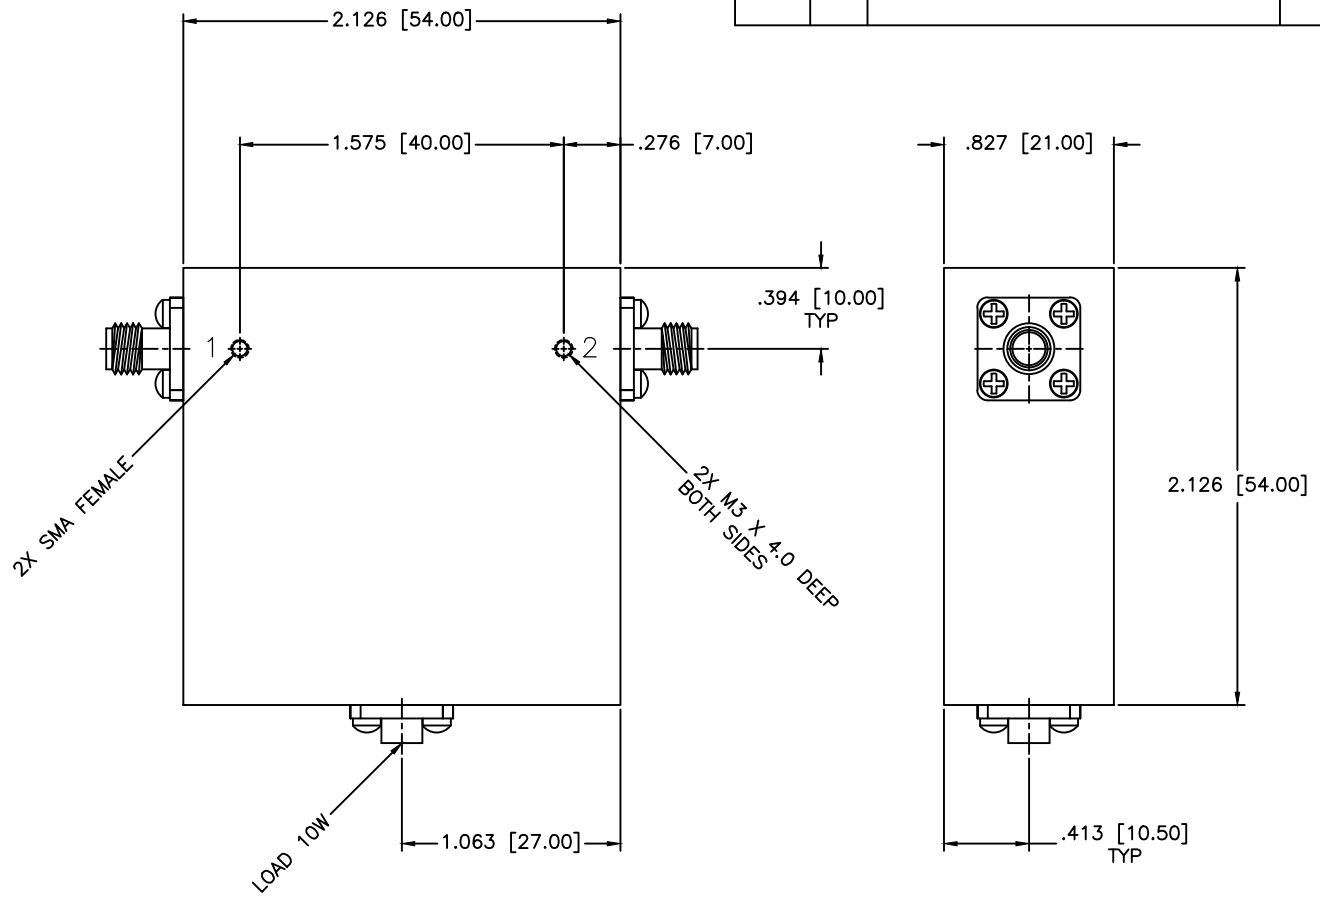

SPECIFICATIONS

Frequency Range: 1.7–2.5 GHz
 Isolation: 25dB Min.
 Insertion loss: 0.40dB Max.
 VSWR: 1.15:1 Max.
 Power: 10W Avg.
 Operating Temperature: +10°C to +40°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM	SCALE:	N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:	COAXIAL ISOLATOR	
DRAWN: Paiboon Luekhamhan		DATE: 05-15-2013	PART NO.:	IS-194	
APPROVED: T. Nguyen		DATE: 05-15-2013	CAGE CODE:	OD2L5	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		SIZE:	N/A	REV:	N/A
THIRD ANGLE PROJECTION		DWG NO.:	86279		
DO NOT SCALE THE DRAWING					