


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

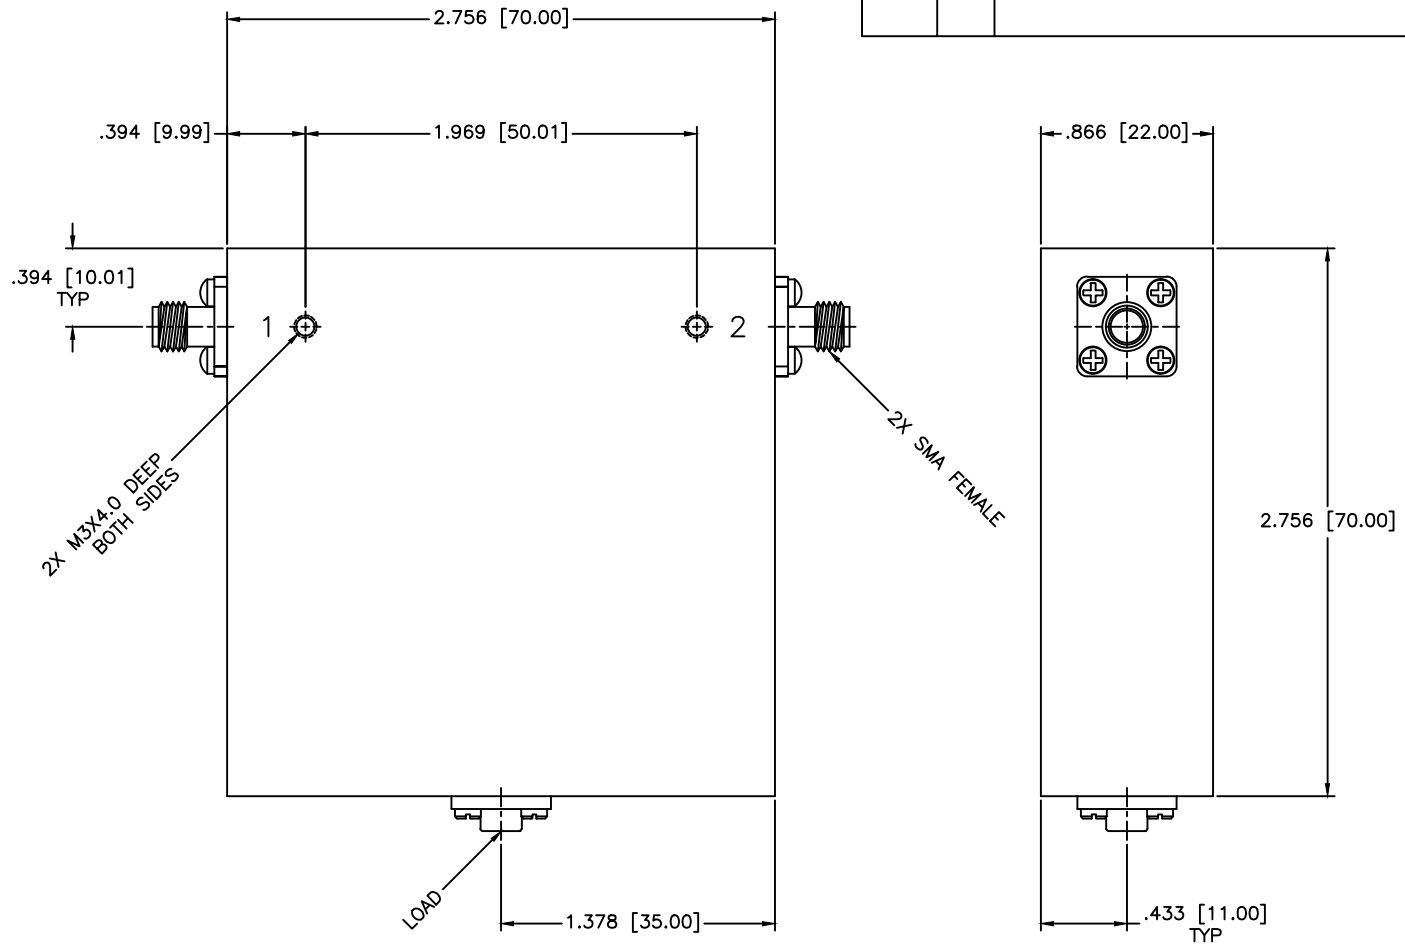

SPECIFICATIONS

Frequency Range: 0.98–2.05 GHz
 Isolation: 17dB Min.
 Insertion loss: 0.60 dB Max.
 VSWR: 1.35:1 Max.
 Power Avg/Peak: 50 Watts / 100W
 Operating Temperature: 0°C TO +55°C

MATERIAL:	
DRAWN: Paiboon Luekhamthan	DATE: 11-01-2007
APPROVED: T. Nguyen	DATE: 11-01-2007



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

DRAWING TITLE:
ISOLATION

PART NO.
IS-2-1



CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 82971
DO NOT SCALE THE DRAWING			