


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

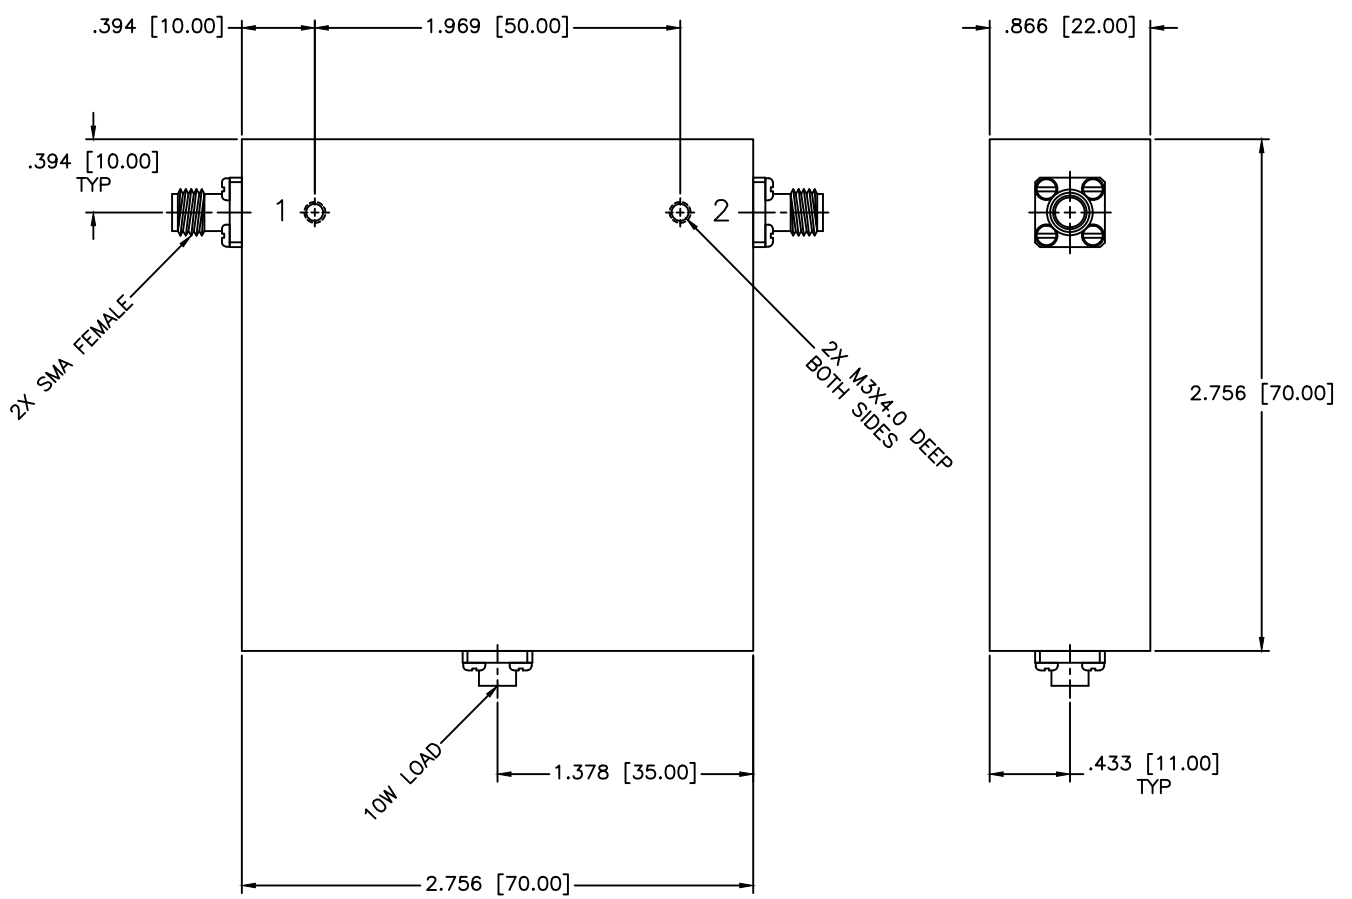

SPECIFICATIONS

Frequency Range: 0.98–2.05 GHz
 Operating Temperature: +10°C to +40°C
 Isolation: 17dB MIN.
 Insertion loss: 0.5dB MAX.
 VSWR: 1.35:1 MAX.
 Power AVG: 10 WATTS
 Power Peak: 100 WATTS

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 08-22-2005
APPROVED: T. Nguyen	DATE: 08-22-2005



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

DRAWING TITLE:
COAXIAL ISOLATOR 10 WATTS

PART NO.
IS-2-10

PROPERTY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

CAGE CODE: OD2L5	SIZE: N/A	REV: N/A	DWG NO. 83087
DO NOT SCALE THE DRAWING			

