


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

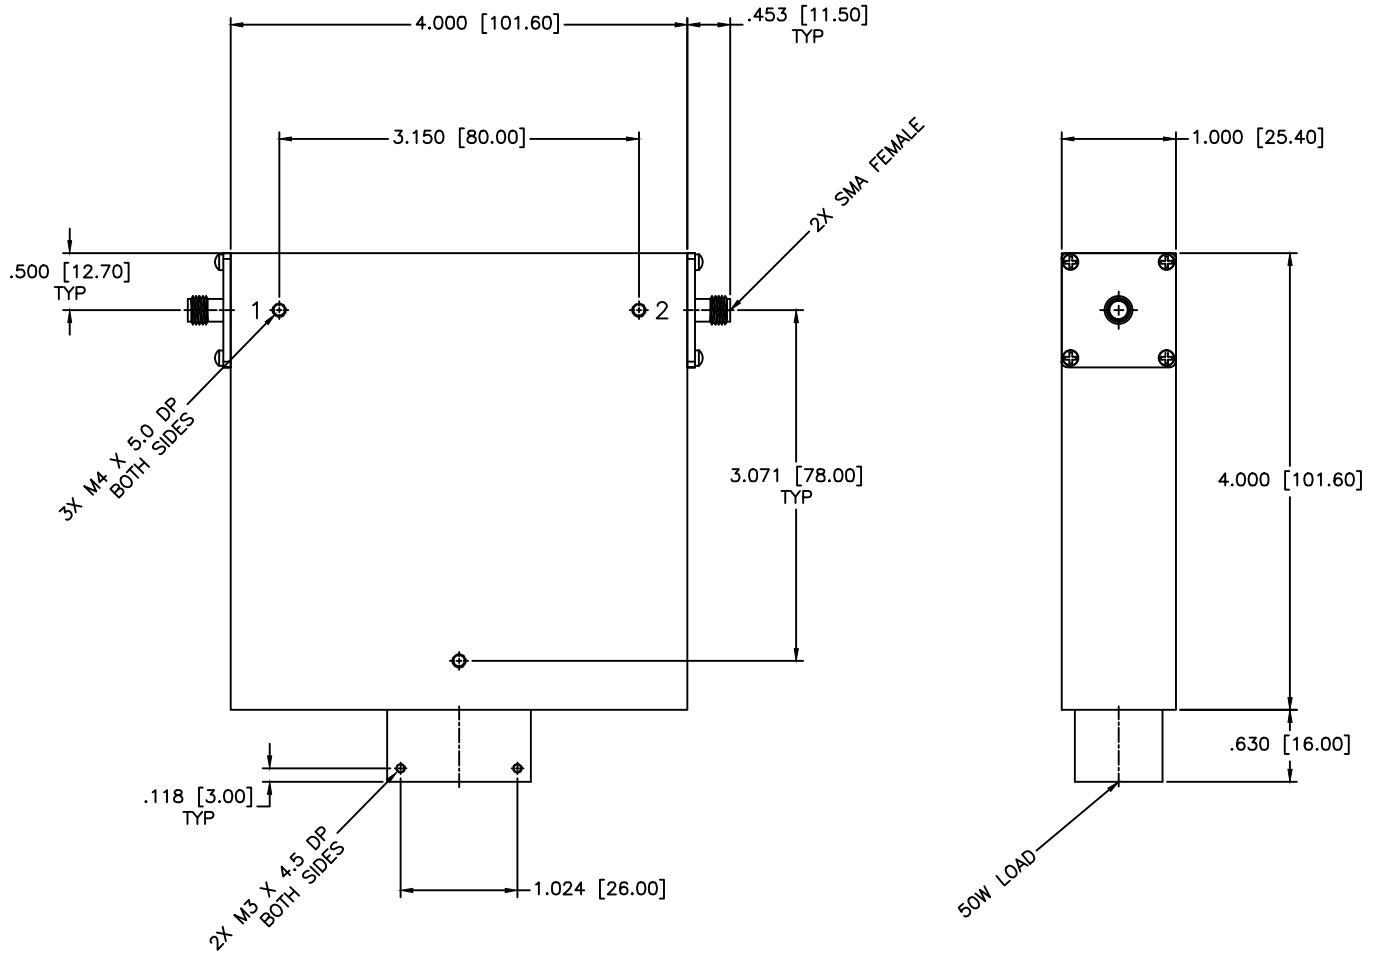

**SPECIFICATIONS**

Frequency Range: 0.70–2.70 GHz  
 Isolation: 10dB Min.  
 Insertion loss: 1.9dB Max.  
 VSWR: 1.92:1 Max.  
 Power: 50 Watts  
 Operating Temperature: +20°C to +30°C

MATERIAL:	DRAWING: Paiboon Luekhamhan	DATE: 02-24-2016	<b>MCL</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-8254 FAX: (727) 381-8118 http://www.mcli.com	SCALE: N/A
				SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES: IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°			DRAWING TITLE: COAXIAL ISOLATOR	
DRAWING: T. Nguyen APPROVED: T. Nguyen DATE: 02-24-2016			PART NO.: IS-201	
CAGE CODE: OD2L5 SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING			DWG NO.: 86609	