


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

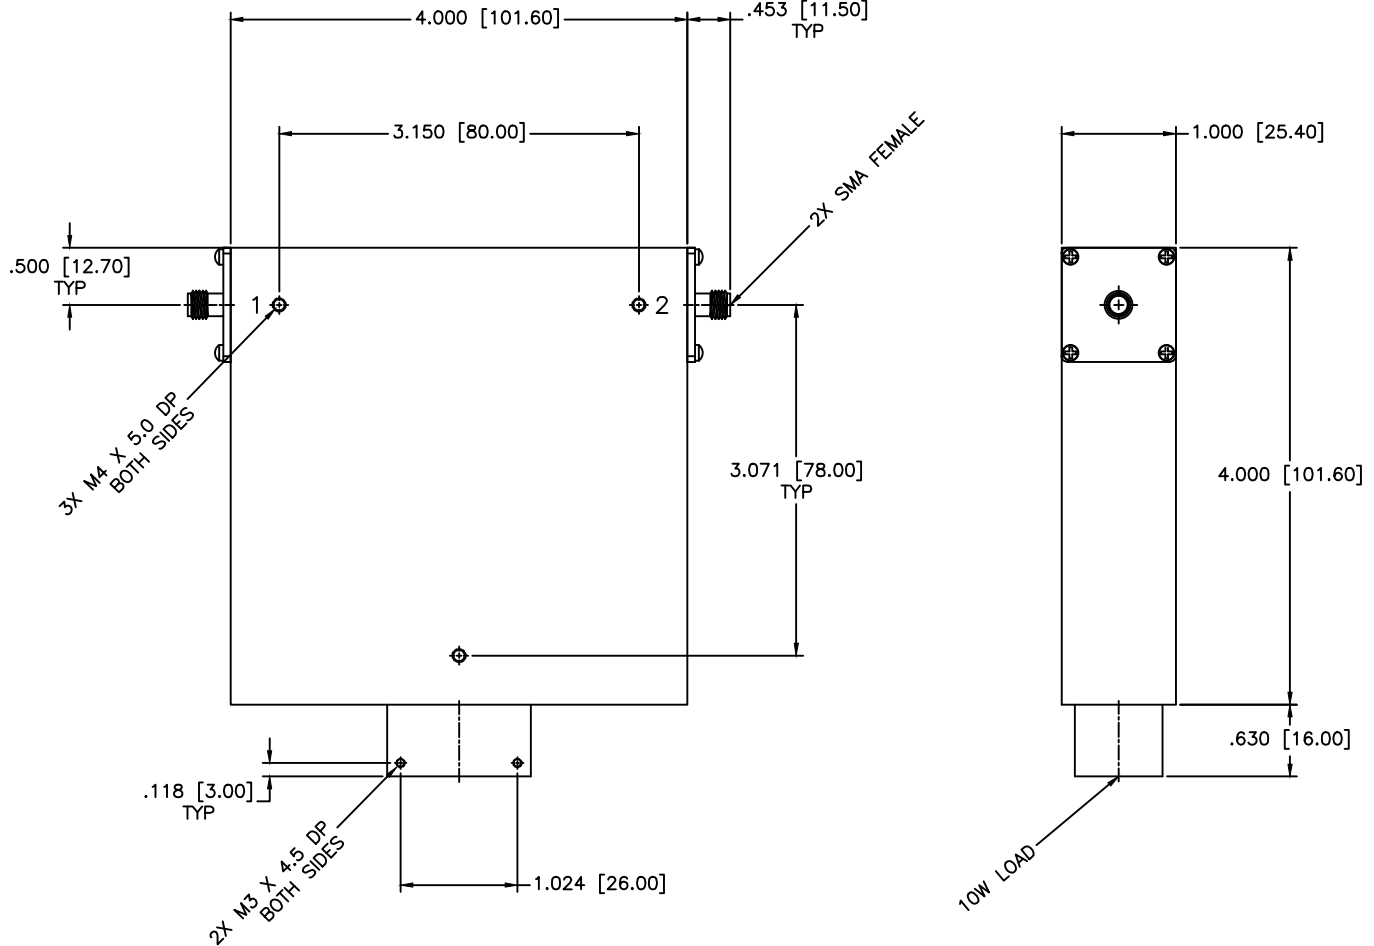

SPECIFICATIONS AT 25±3°C

Frequency Range: 0.70–2.0 GHz

Isolation: 13dB Min.

Insertion loss: 1.0dB Max.

VSWR: 1.60:1 Max.

Power: 10 Watts

MATERIAL:		<b>MCL</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N, SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 <a href="http://www.mcll.com">http://www.mcll.com</a>	SCALE:	N/A
DRAWN: Paiboon Luekhamhan			DATE: 05-17-2016	SHEET:
APPROVED: T. Nguyen		DATE: 05-17-2016	DRAWING TITLE: COAXIAL ISOLATOR	
<small>UNLESS OTHERWISE SPECIFIED:          TOLERANCES          IN (INCHES) OR [mm] (MILLIMETERS)          FRACTIONS: ± 1/64          DECIMALS: ± 0.01 ± 0.05          ANGLE: ± 1/2°</small>		PART NO. IS-202		
<small>DISCLAIMER NOTICE:          THE INFORMATION IN THIS DRAWING IS PROPRIETARY          AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN          PERMISSION FROM MICROWAVE COMMUNICATIONS          LABORATORIES INC. (MCL)</small>		CAGE CODE: OD2L5	SIZE: N/A	REV: N/A
<small>THIRD ANGLE PROJECTION</small>		DO NOT SCALE THE DRAWING		DWG NO. 86620