REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

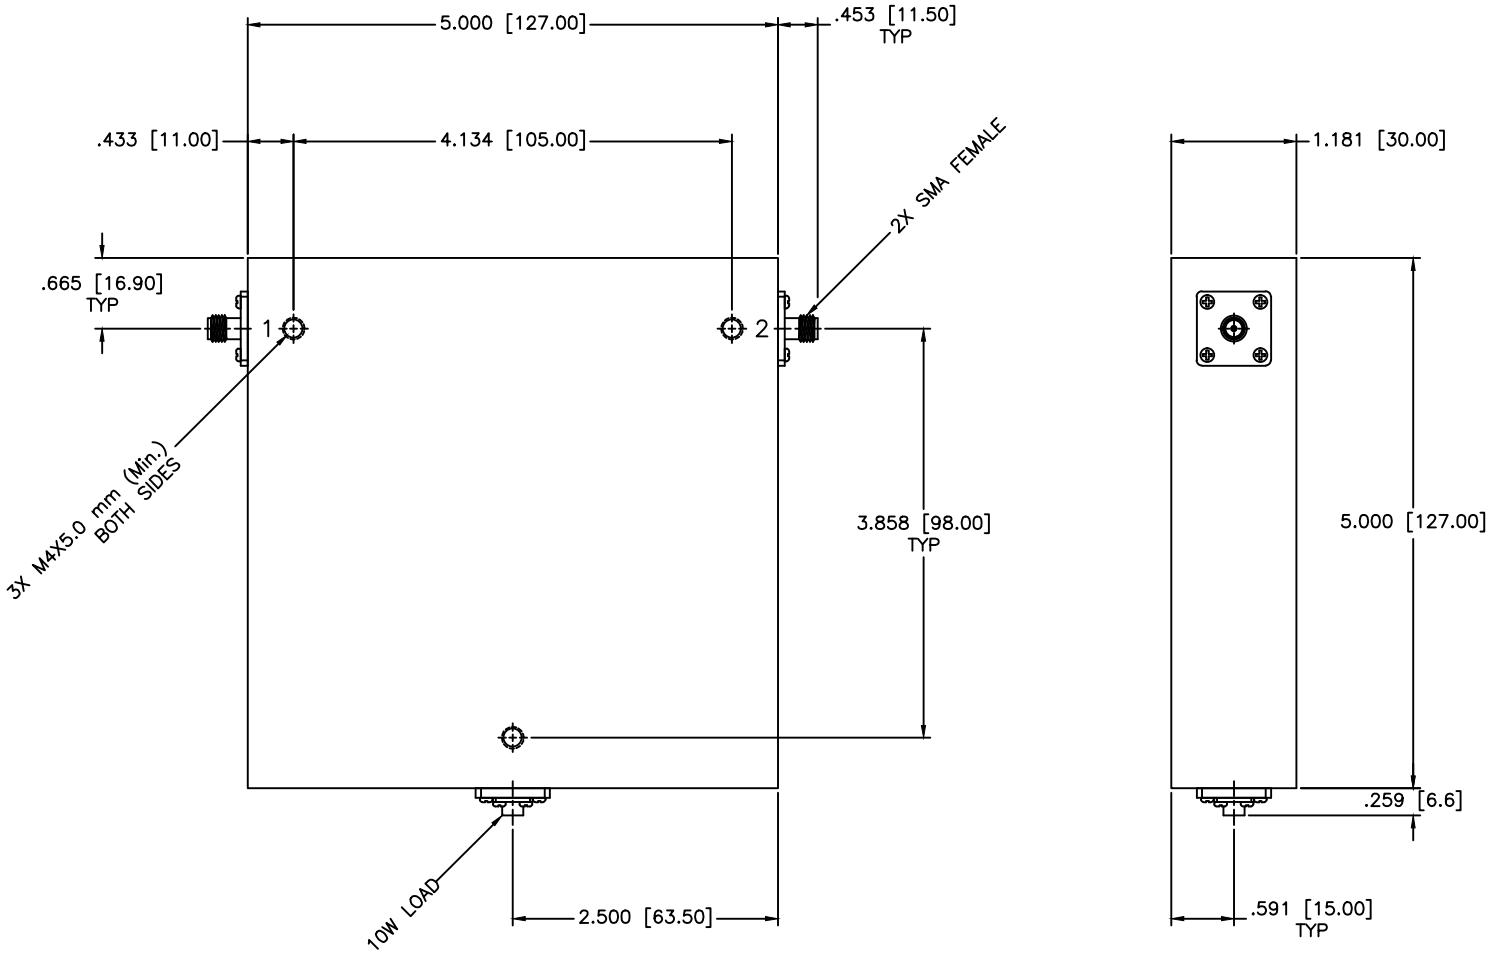

SPECIFICATIONS AT +25±5°C

Frequency Range:	0.60–1.325 GHz
Isolation:	20dB Min.
Insertion loss:	0.5dB Max.
VSWR:	1.30:1 Max.
Forward Power:	10 Watts
Reverse Power:	10 Watts

MATERIAL:

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-8254 FAX: (727) 381-6116
https://www.MCLI.COM

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

DRAWN: Paiboon Luekhamhan — DATE: 07-14-2021
APPROVED: T. Nguyen — 07-14-2021

SCALE: N/A
SHEET: N/A

DRAWING TITLE: COAXIAL ISOLATOR

PART NO.: IS-211

CAGE CODE: 0D2L5
SIZE: N/A
REV: N/A
DWG NO.: 86912

DO NOT SCALE THE DRAWING