


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

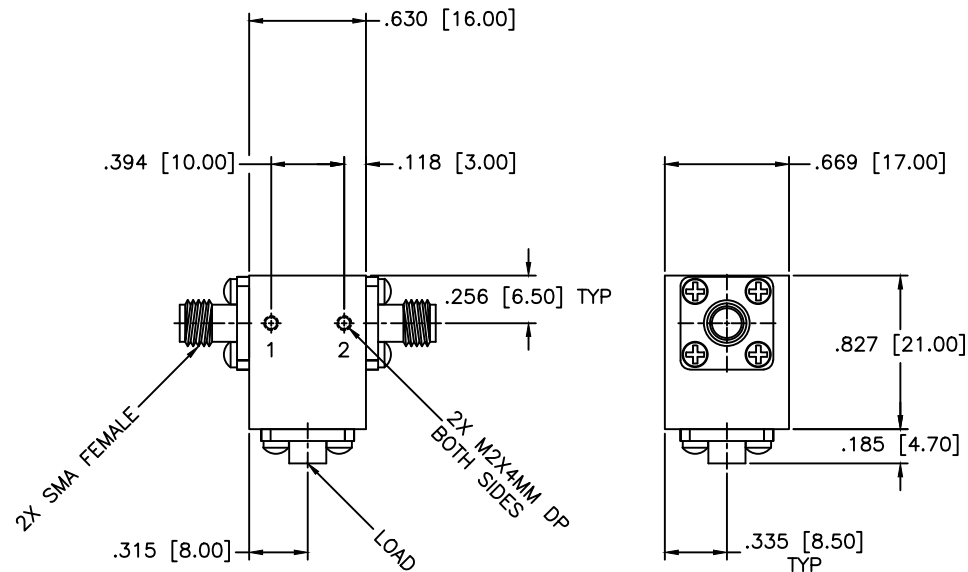

SPECIFICATIONS

Frequency Range: 8–18 GHz
 Isolation: 16dB Min.
 Insertion loss: 0.80dB Max.
 VSWR: 1.45:1 Max.
 Operating Temperature: –54°C to +85°C
 Power: 25W Avg, 250W Peak

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan DATE: 08-06-2001		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.05 ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL ISOLATOR	
				PART NO. IS-29	
APPROVED: T. Nguyen DATE: 08-06-2001		THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5	SIZE: A REV: N/A DO NOT SCALE THE DRAWING
				DWG NO. 82117	