


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

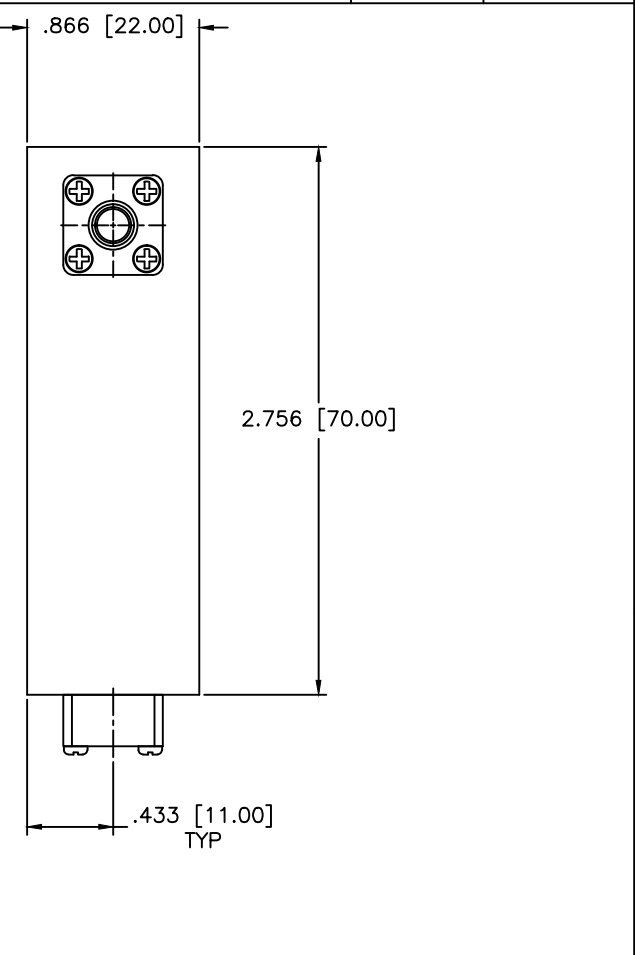

SPECIFICATIONS

Frequency Range: 1.5–3.0 GHz
 Isolation: 13dB Min.
 Insertion loss: 1.0dB Max.
 VSWR: 1.60:1 Max.
 Power: 15W Avg, 100W Peak
 Operating Temperature: -10°C to +40°C

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 09-11-2007
APPROVED: T. Nguyen	DATE: 09-11-2007

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ± .01 ± .005
 ANGLE: ± 1/2°

DRAWING TITLE:
COAXIAL ISOLATOR

PART NO.
IS-4-15

THIRD ANGLE PROJECTION

CAGE CODE:
OD2L5

SIZE: **A** REV: **N/A**
 DO NOT SCALE THE DRAWING

DWG NO.
82940