
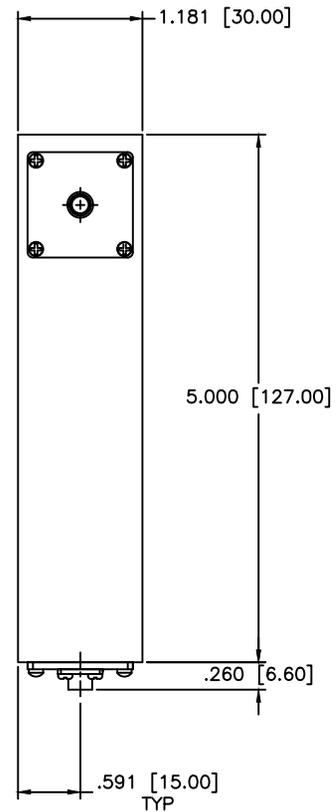


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

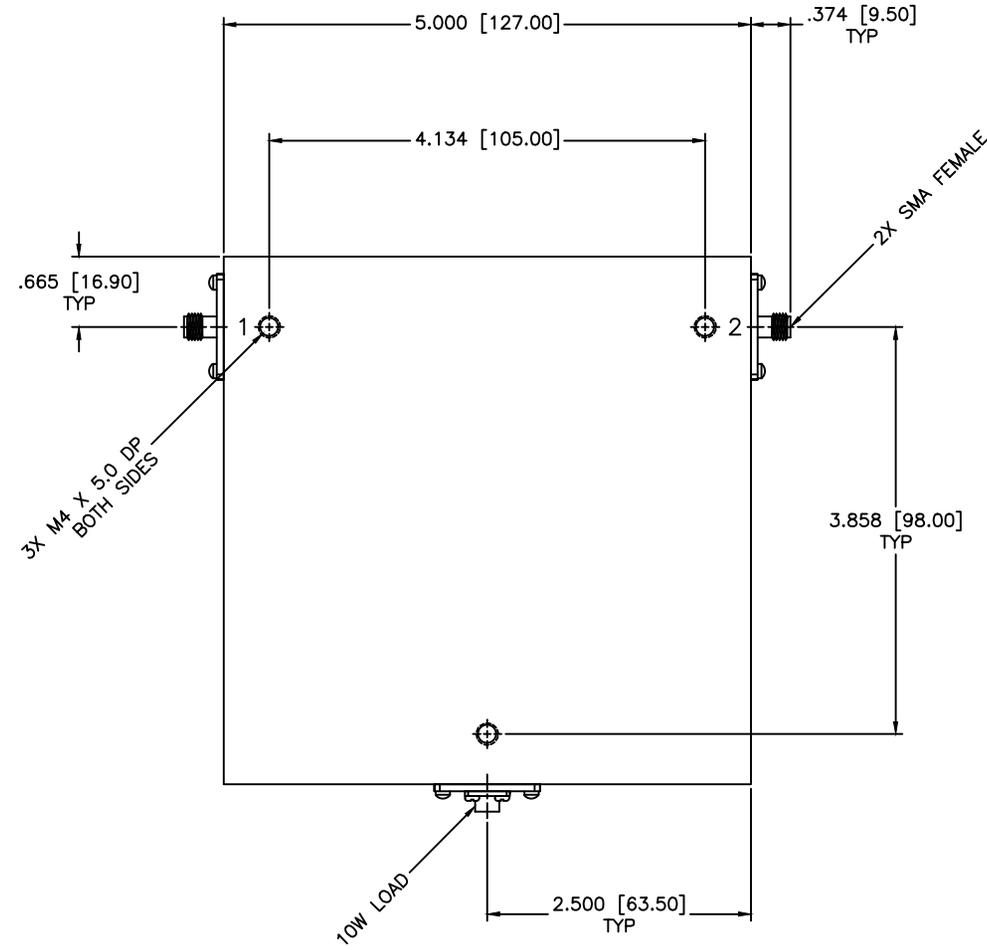

SPECIFICATIONS AT +25±5°C

Frequency Range: 600–1400 MHz  
 Isolation: 18dB Min.  
 Insertion loss: 0.50dB Max.  
 VSWR: 1.30:1 Max.  
 Forward Power: 10W CW  
 Reverse Power: 10W CW

UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± 0.019 ANGLES: ± 1/2°	<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7220 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8254 FAX: (727) 381-8118 WWW.MCLIL.COM	SCALE: N/A SHEET: N/A
DRAWING TITLE: COAXIAL ISOLATOR		
PART NO.: IS-481		
DRAWN: Palboon L. DATE: 03-25-2028 APPROVED: T. Nguyen DATE: 03-25-2028	GAGE CODE: 002L5 SHEET: N/A REV: N/A PART NO.: 87417	DO NOT SCALE THE DRAWING