


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

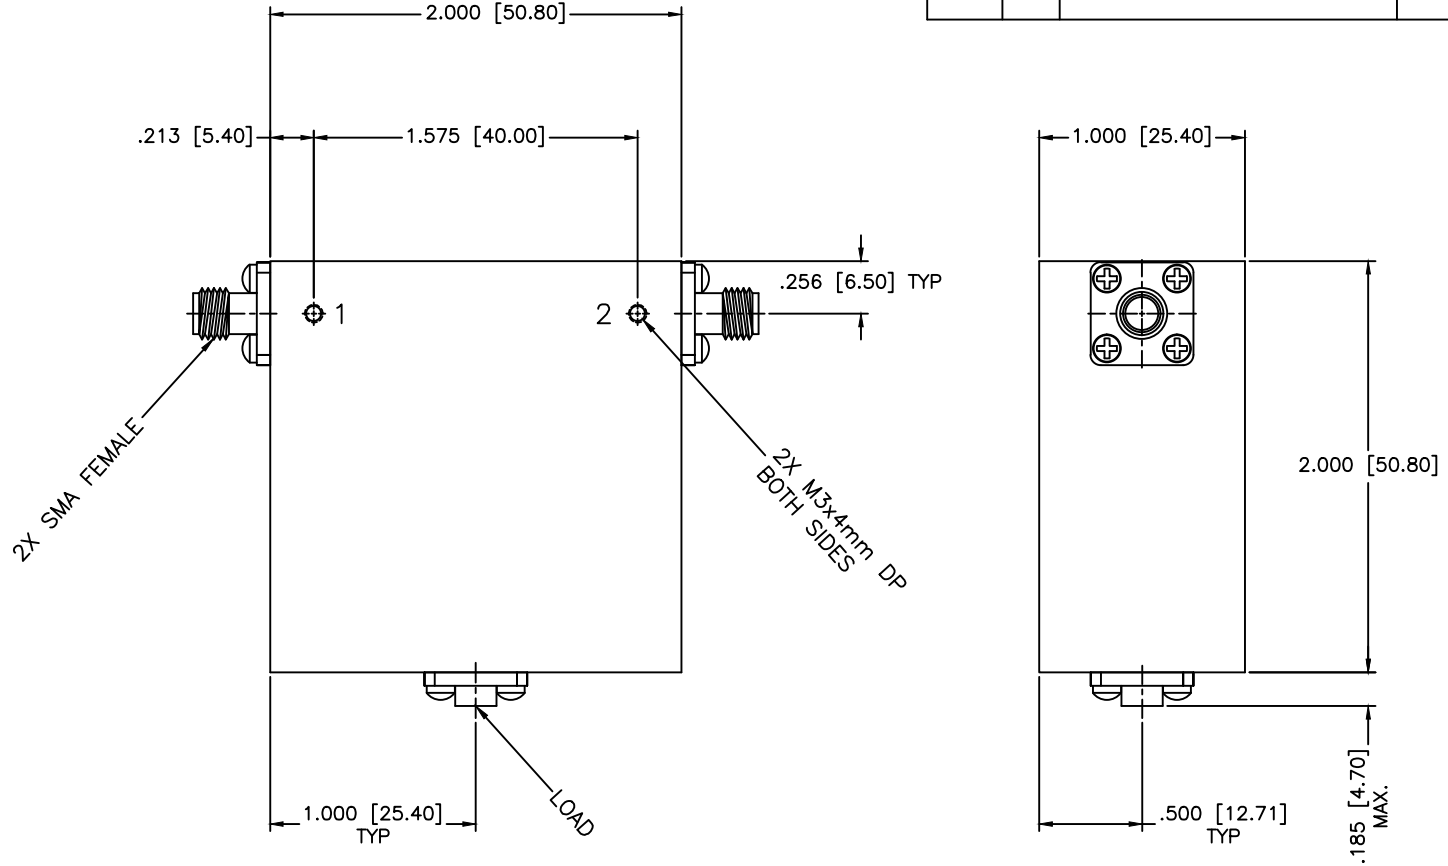

SPECIFICATIONS

Frequency Range: 0.8–1.0 GHz
 Isolation: 20dB Min.
 Insertion loss: 0.40dB Max.
 VSWR: 1.25:1 Max.
 Power: 1W Avg.
 Operating Temperature: -54°C to +85°C

MATERIAL:	
DRAWN: Paiboon luekhamhan	DATE: 03-13-2008
APPROVED: T. Nguyen	DATE: 03-13-2008

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET:	N/A
DRAWING TITLE: COAXIAL ISOLATOR		PART NO.: IS-62		
CAGE CODE: OD2L5		SIZE: N/A	REV: N/A	DWG NO.: 83089
DO NOT SCALE THE DRAWING				

THIRD ANGLE PROJECTION