



REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

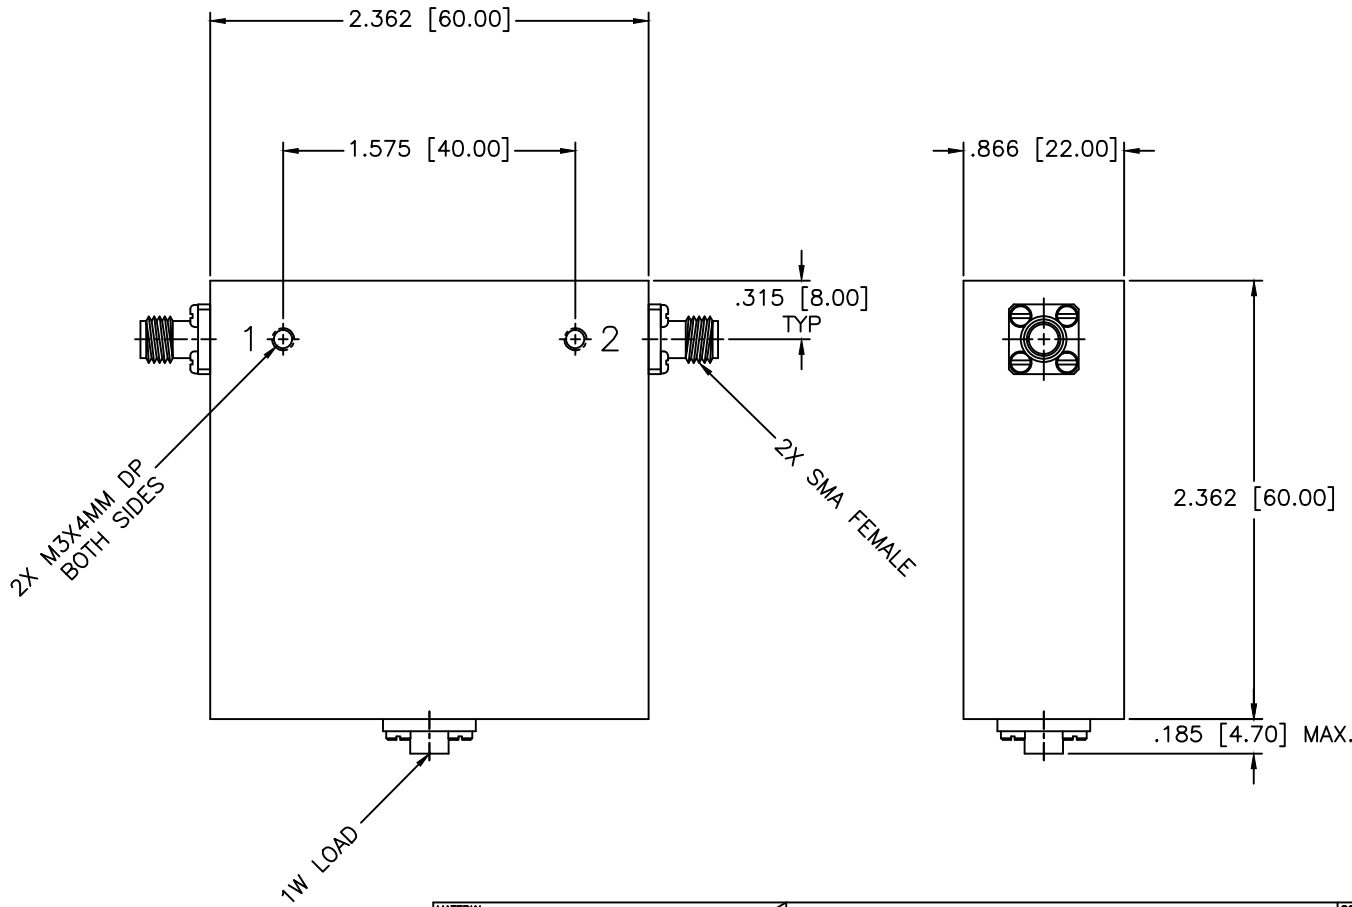

SPECIFICATIONS

Frequency Range: 1.5–3.0 GHz
 Isolation: 17dB Min.
 Insertion loss: 0.60dB Max.
 VSWR: 1.35:1 Max.
 Operating Temperature: 0°C to +55°C

MATERIAL:	
	
<small>UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°</small>	
<small>DRAWN:</small> Paiboon Luekhamhan	<small>DATE:</small> 01-04-2005
<small>APPROVED:</small> T. Nguyen	<small>DATE:</small> 01-04-2005

<small>MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM</small>		<small>SHEET:</small> N/A
<small>DRAWING TITLE:</small> COAXIAL ISOLATOR		<small>SHEET:</small> N/A
<small>PART NO.</small> IS-7		
<small>CAGE CODE:</small> OD2L5	<small>SIZE:</small> A	<small>REV:</small> A
<small>DO NOT SCALE THE DRAWING</small>		<small>DWG NO.</small> 82106

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

