




REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

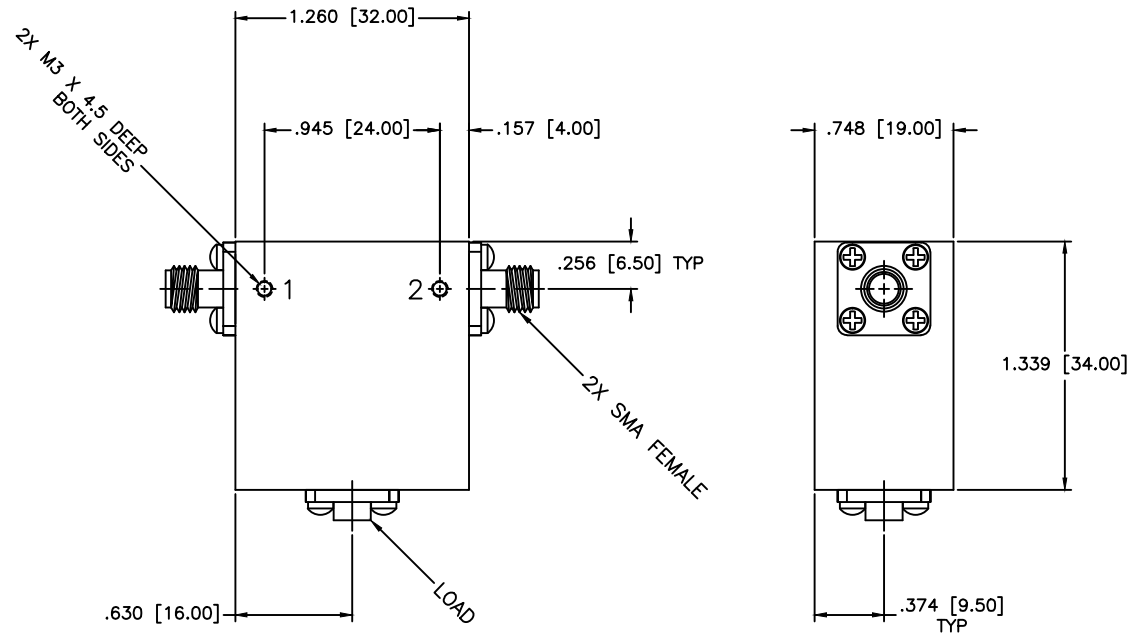

SPECIFICATIONS

Frequency Range: 1.03–1.09 GHz
 Operating Temperature: 0°C to +70°C
 Isolation: 20dB Min.
 Insertion loss: 0.40dB Max.
 VSWR: 1.25:1 Max.
 Circulator Power: 50W Avg, 2kW Peak

MATERIAL:		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°			DRAWING TITLE:	COAXIAL ISOLATOR
DRAWN: Paiboon Luekhamhan		DATE: 03-22-1999	PART NO.:	IS-75
APPROVED: T. Nguyen		DATE: 03-22-1999	CAGE CODE: OD2L5	SIZE: A
			REV: A	DWG NO. 81217
			DO NOT SCALE THE DRAWING	

