


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

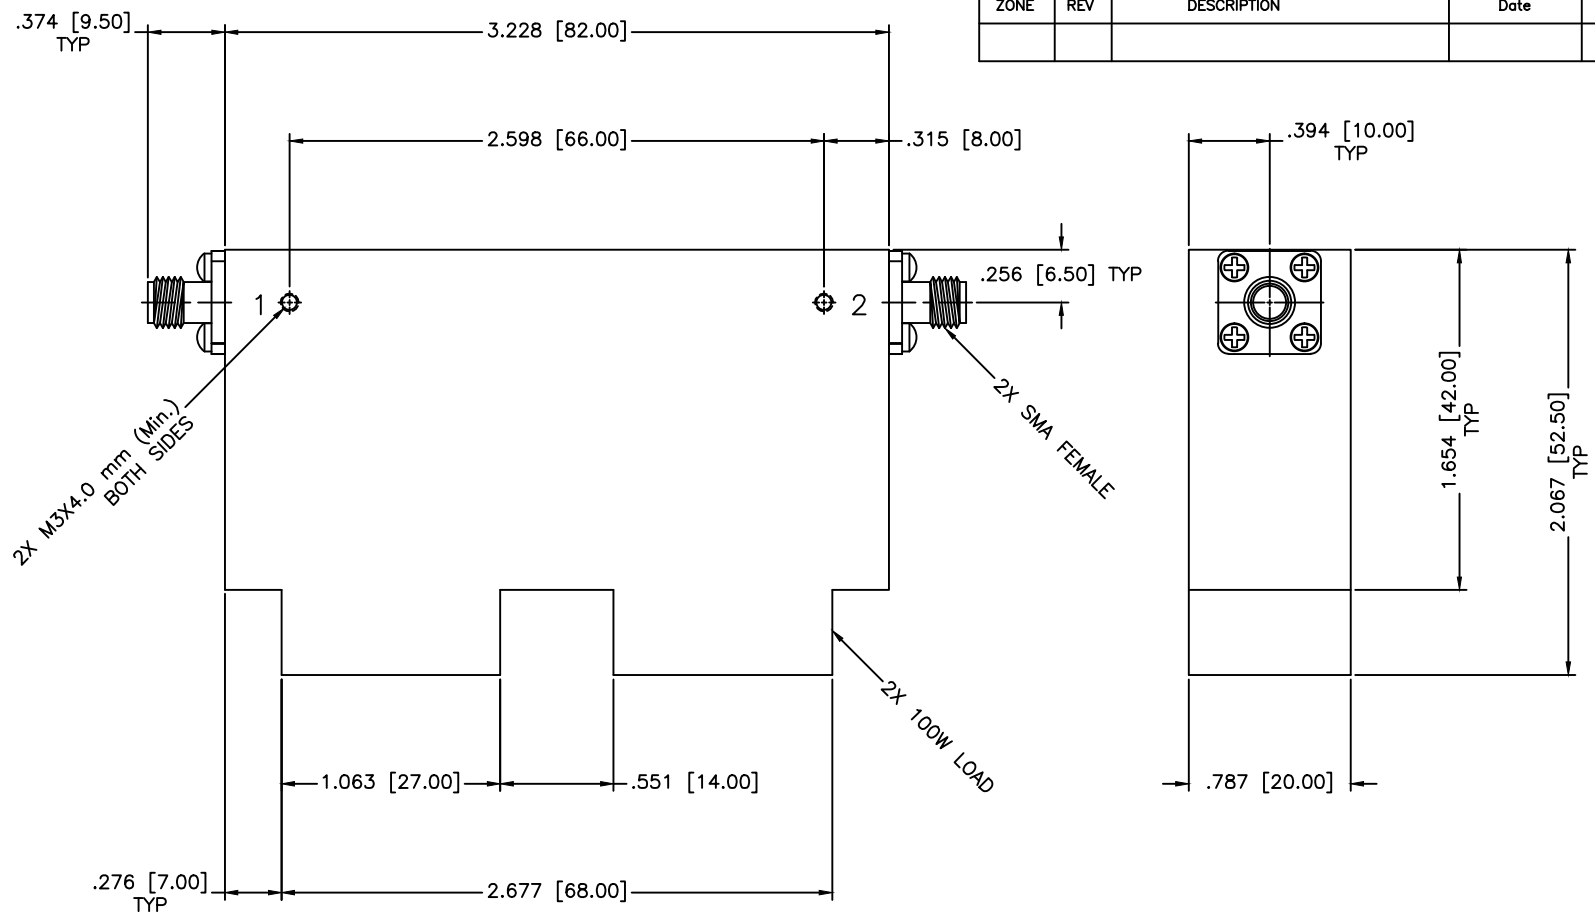

**SPECIFICATIONS**

Frequency Range: 1.8–4.0 GHz  
 Isolation: 35dB Min.  
 Insertion loss: 1.0dB Max.  
 VSWR: 1.35:1 Max.  
 FW & REV Power: 50 Watts AVG.  
 Peak Power: 500 Watts

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://www.mcli.com">http://www.mcli.com</a>	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>ISOLATOR, DUAL JUNCTION</b>	
DRAWN: Paiboon Luekhamhan		PART NO.: <b>ISDJ-10</b>	
DATE: 6-01-2020		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		SIZE: N/A	REV: N/A
DATE: 6-01-2020		DWG NO.: 84275	
<small>THIRD ANGLE PROJECTION</small> 		DO NOT SCALE THE DRAWING	