


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

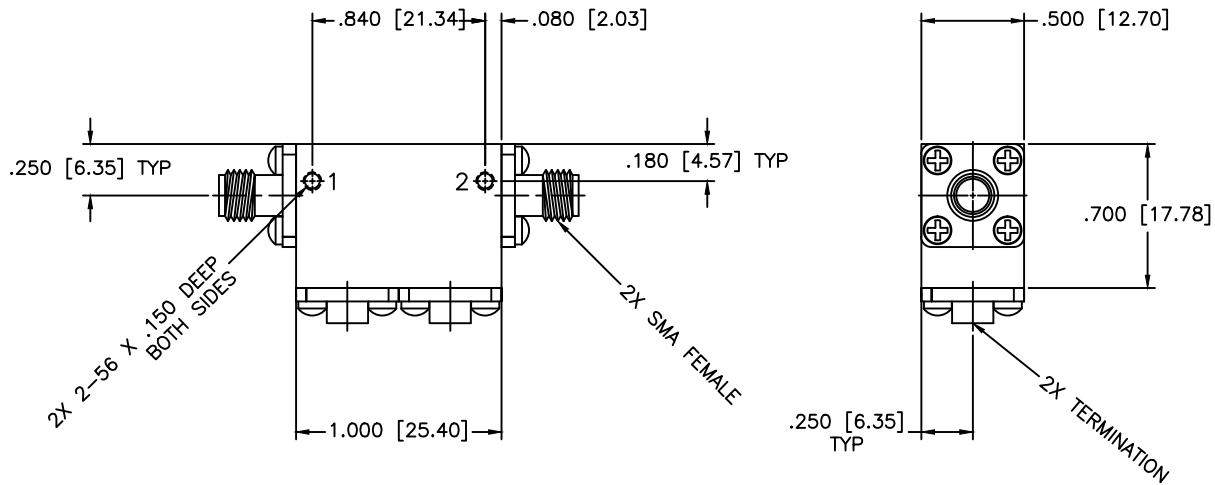

SPECIFICATIONS

MODEL NUMBER	FREQUENCY RANGE (GHz)	ISOLATION (dB)	INSERTION LOSS (dB) MIN. MAX.	VSWR	POWER (WATT) MAX. AVG.	OPERATING TEMPERATURE RANGE (C°)
ISDJ-19	9.2-10.5	46	0.4	1.20	10	-20 to +65
ISDJ-20	10.7-11.7	46	0.4	1.20	10	-20 to +65
ISDJ-21	11.7-12.7	46	0.4	1.20	10	-20 to +65
ISDJ-22	12.0-18.0	40	1.0	1.25	5	-20 to +65
ISDJ-23	14.0-14.5	46	0.6	1.20	10	-20 to +65
ISDJ-24	17.0-20.0	44	0.8	1.20	5	-20 to +65
ISDJ-25	19.0-21.0	45	0.9	1.20	5	-20 to +65

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: DUAL JUNCTION ISOLATOR		
DRAWN: Paiboon Luekhamhan		PART NO.: ISDJ-19 to -25		
DATE: 04-07-2009		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 04-07-2009		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		SIZE: N/A	REV: N/A	DWG NO. 84360
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		