


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

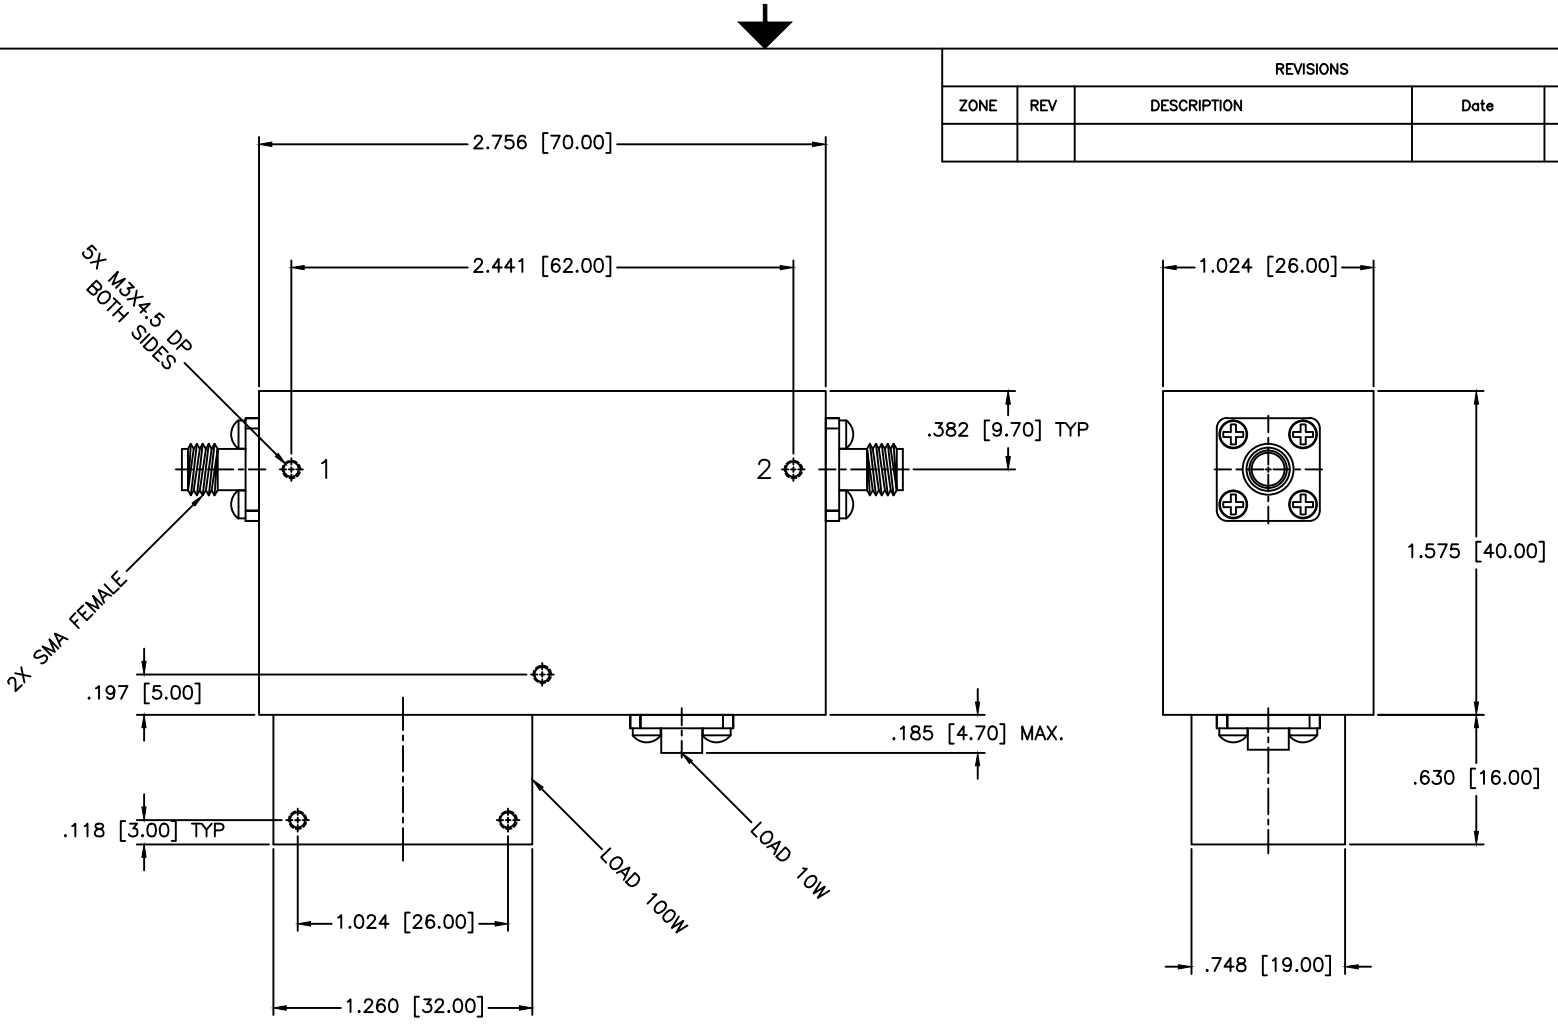

SPECIFICATIONS

Frequency Range: 0.7–0.8 GHz
 Isolation: 40dB Min.
 Insertion loss: 0.70dB Max.
 VSWR: 1.25:1 Max.
 Power: 100W
 Operating Temperature: -30°C to +70°C

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 11-30-2009
APPROVED: T. Nguyen	DATE: 11-30-2009

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± N/A DECIMALS: ±.020 ANGLE: ±1/2°		SHEET:	N/A
DRAWING TITLE: <h3>DUAL JUNCTION ISOLATOR</h3>		PART NO.: <h3>ISDJ-3</h3>		
CAGE CODE: OD2L5		SIZE: N/A	REV: A	DWG NO.: 84359
DO NOT SCALE THE DRAWING				

THIRD ANGLE PROJECTION