


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

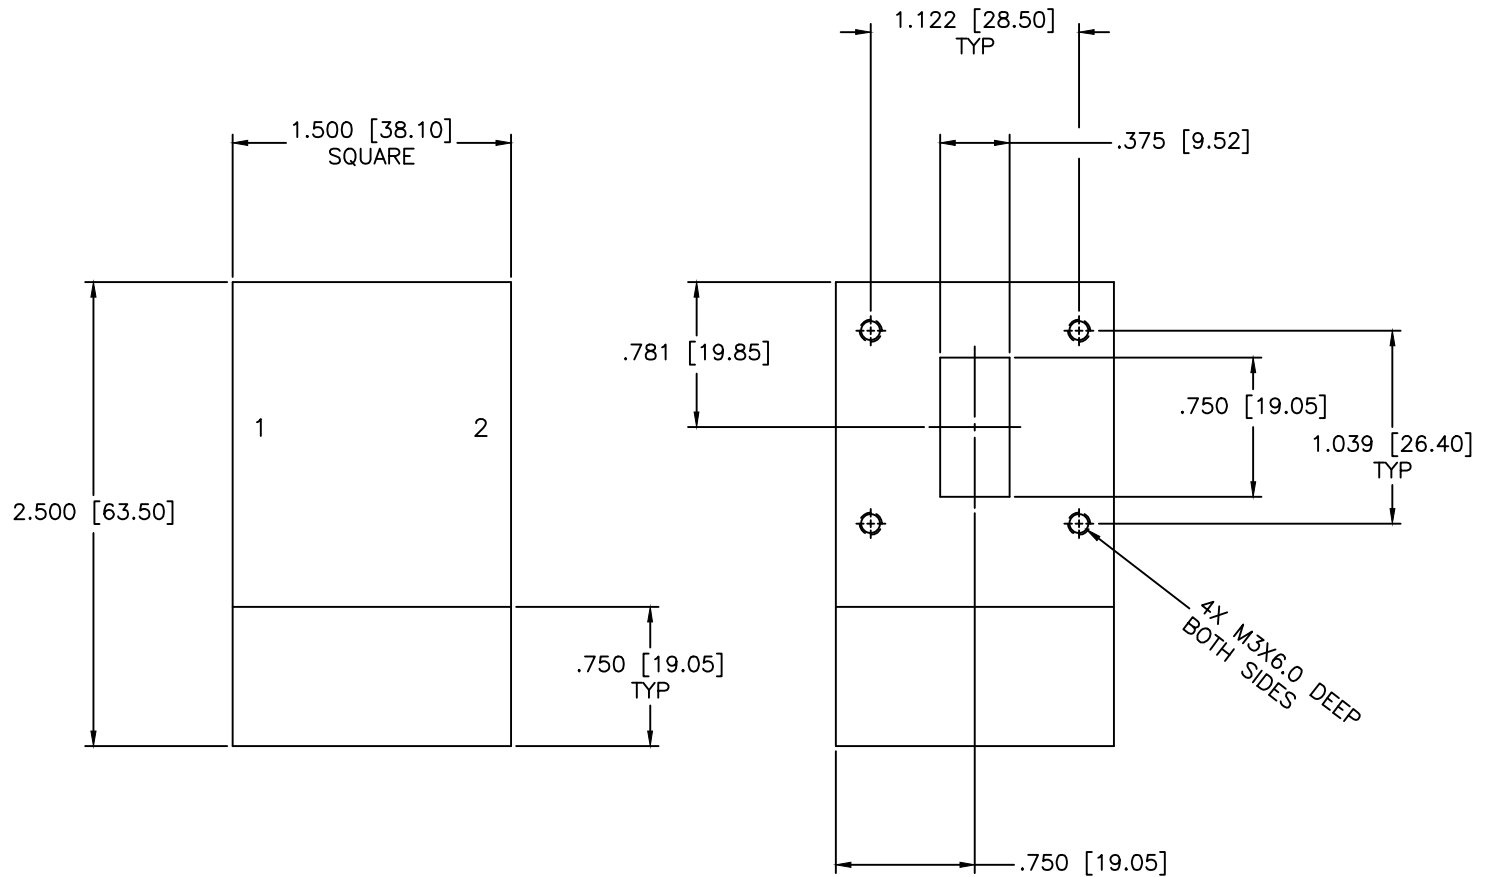

**SPECIFICATIONS**

FREQUENCY RANGE: 13-14.5 GHz  
 EIA DESIGN (1-2): WR75  
 VSWR: 1.20:1 Max.  
 INSERTION LOSS: 0.25dB Max.  
 ISOLATION: 21dB Max.  
 POWER: 3W, 500W Peak  
 OPERATING TEMPERATURE: -30°C to +70°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE: <b>WR75 WAVEGUIDE ISOLATOR</b>		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 02-15-2011		PART NO. <b>ISW-10</b>	
APPROVED: T. Nguyen		DATE: 02-15-2011		CAGE CODE: 0D2L5	SIZE: A REV: N/A DWG NO. 85514
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING	