REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

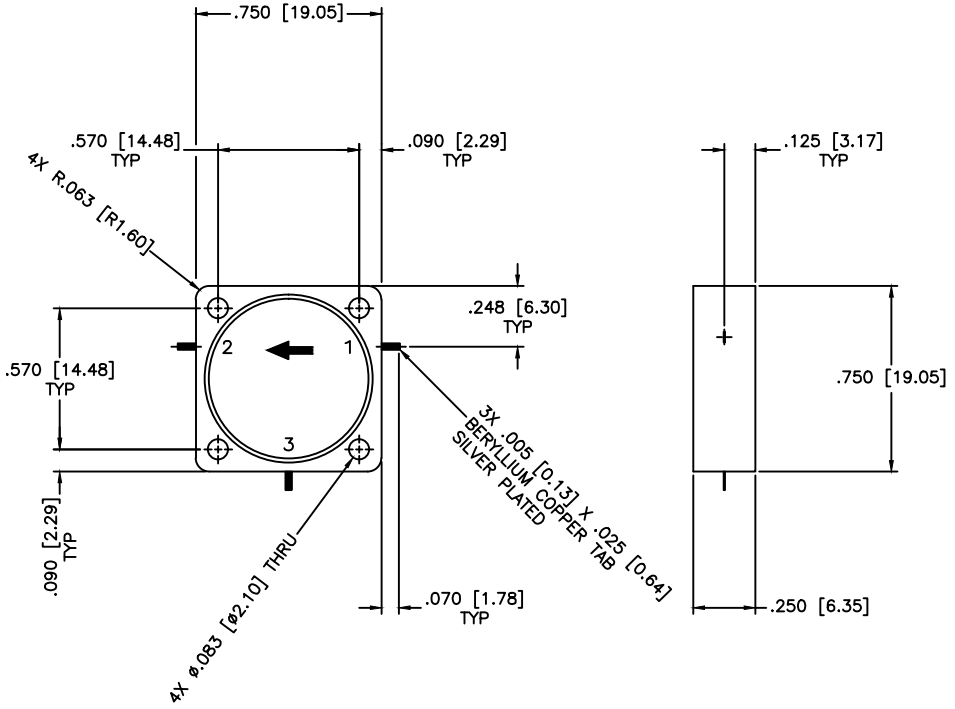

SPECIFICATIONS

Frequency Range:	2.7–3.1 GHz
Isolation:	20dB Min.
Insertion loss:	0.5dB Max.
VSWR:	1.25:1 Max.
Power:	50W Avg.
Operating Temperature:	–40°C to +85°C

MATERIAL:

DRAWN: Paiboon Luekhamhan — DATE: 03-02-2012

APPROVED: T. Nguyen — DATE: 03-02-2012

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
hhtp://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.02 ±.009
ANGLE: ±1/2°

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

SCALE: N/A
SHEET: N/A

DRAWING TITLE: DROP-IN CIRCULATOR, COUNTER CLOCKWISE

PART NO. MC-102/CC

CAGE CODE: 0D2L5
SIZE: N/A
REV: N/A
DWG NO. 86006
DO NOT SCALE THE DRAWING