


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

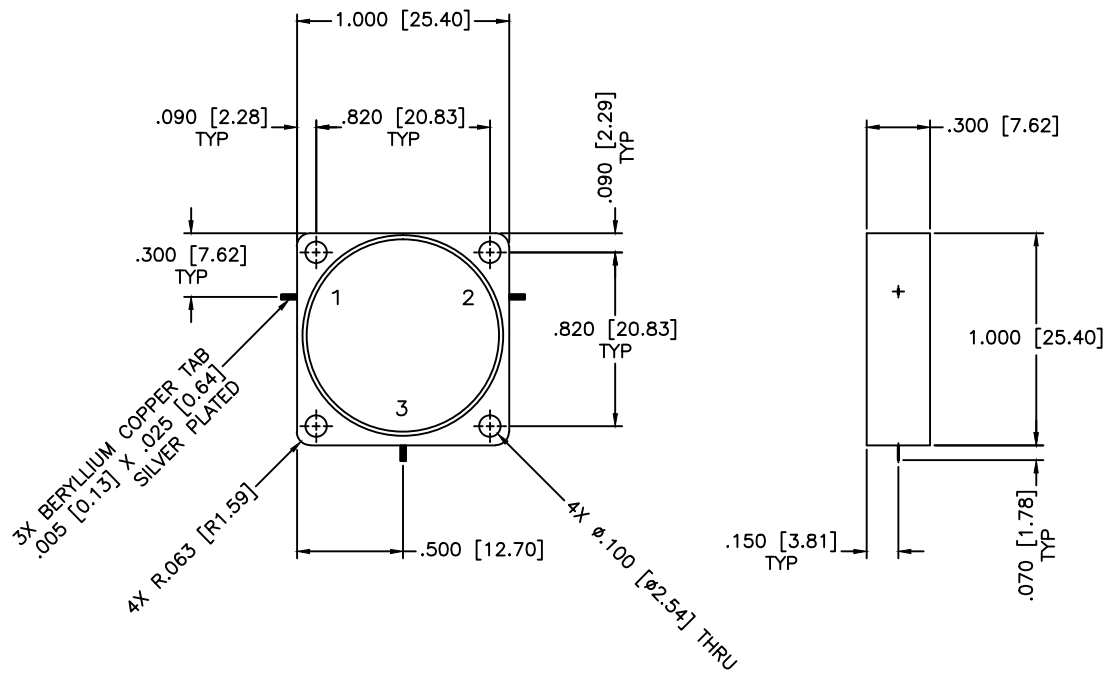

SPECIFICATIONS

Frequency Range: 1.1–1.4 GHz
 Isolation: 18dB Min.
 Insertion loss: 0.6dB Max.
 VSWR: 1.33:1 Max.
 Operating Temperature: -30°C to +70°C
 Power: 1 Watt

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 03-12-2012		DRAWING TITLE: DROP-IN CIRCULATOR	
APPROVED: T. Nguyen		DATE: 03-12-2012		PART NO. MC-105	
THIRD ANGLE PROJECTION		CAGE CODE: OD2L5	SIZE: N/A	REV: N/A	DWG NO. 86018
DO NOT SCALE THE DRAWING					