


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

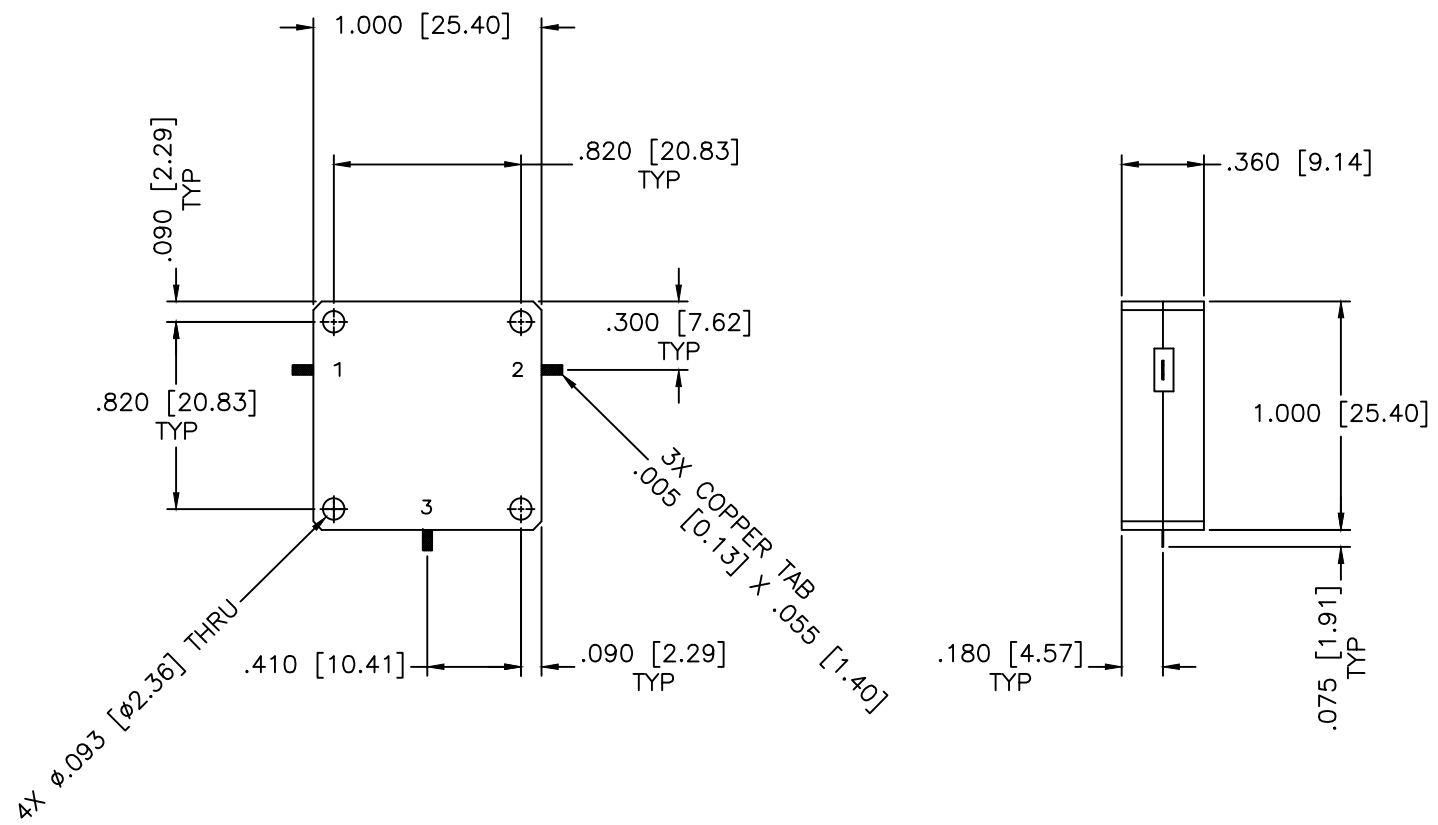

**SPECIFICATIONS**

- Frequency Range: 1.25–1.30 GHz
- Insertion Loss: 0.3dB Max.
- Isolation: 20dB Min.
- VSWR: 1.22:1 Max.
- Impedance Nominal: 50 Ohms
- Power Rating: 150 Watts
- Operating Temperature: -20°C to +20°C
- Storage Temperature: -55°C to +100°C

MATERIAL:	
DRAWN: Paiboon Luekhamthan	DATE: 05-25-2006
APPROVED: T. Nguyen	DATE: 05-25-2006

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: <b>OUTLINE DRAWING</b>		PART NO. <b>MC-22</b>	
CAGE CODE: <b>0D2L5</b>	SIZE: N/A	REV: N/A	DWG NO. <b>82559</b>
DO NOT SCALE THE DRAWING			

