


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

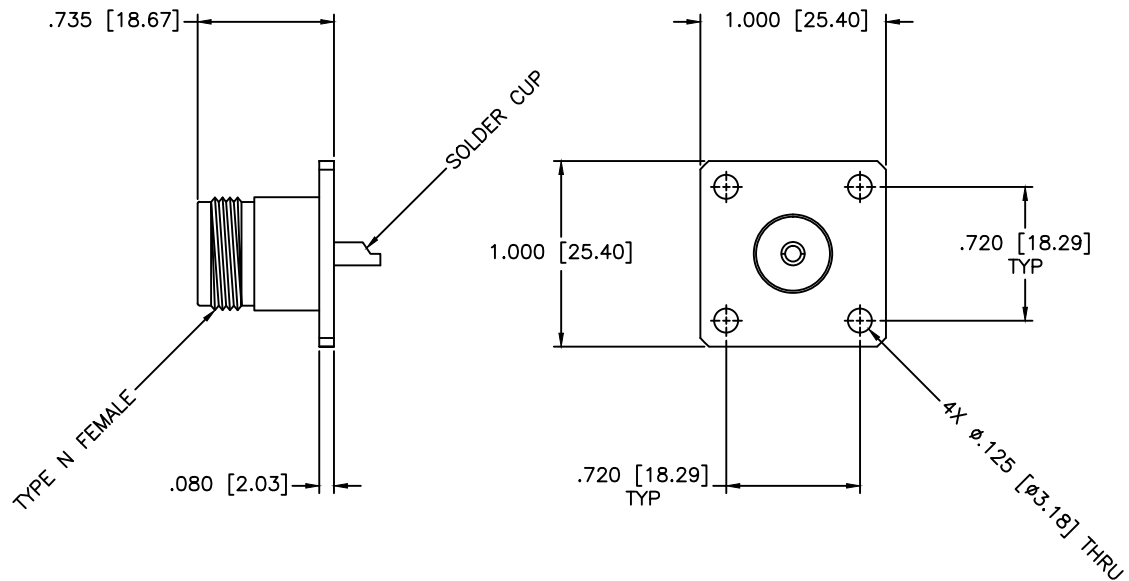

**SPECIFICATIONS**

Frequency Range: DC–8 GHz  
 VSWR: 1.19 Max.  
 Voltage Rating: 1,000 VRMS  
 Dielectric Withstanding Voltage: 2,500 VRMS Min.  
 Impedance: 50 OHMS  
 Temperature Range: –55°C to +85°C

**MATERIAL & FINISHING**

Shell: Brass, Nickel plated  
 Contact: Copper, Gold plated  
 Insulator: PTFE Teflon

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:		
		TYPE N FEMALE CONNECTOR		
DRAWN:		PART NO.		
Paiboon luekhamhan		MC08-240		
DATE:	04-30-2013	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE:	SIZE:
APPROVED:	T. Nguyen		OD2L5	A
DATE:	04-30-2013	THIRD ANGLE PROJECTION	REV:	N/A
			DWG NO.	86272
		DO NOT SCALE THE DRAWING		