


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

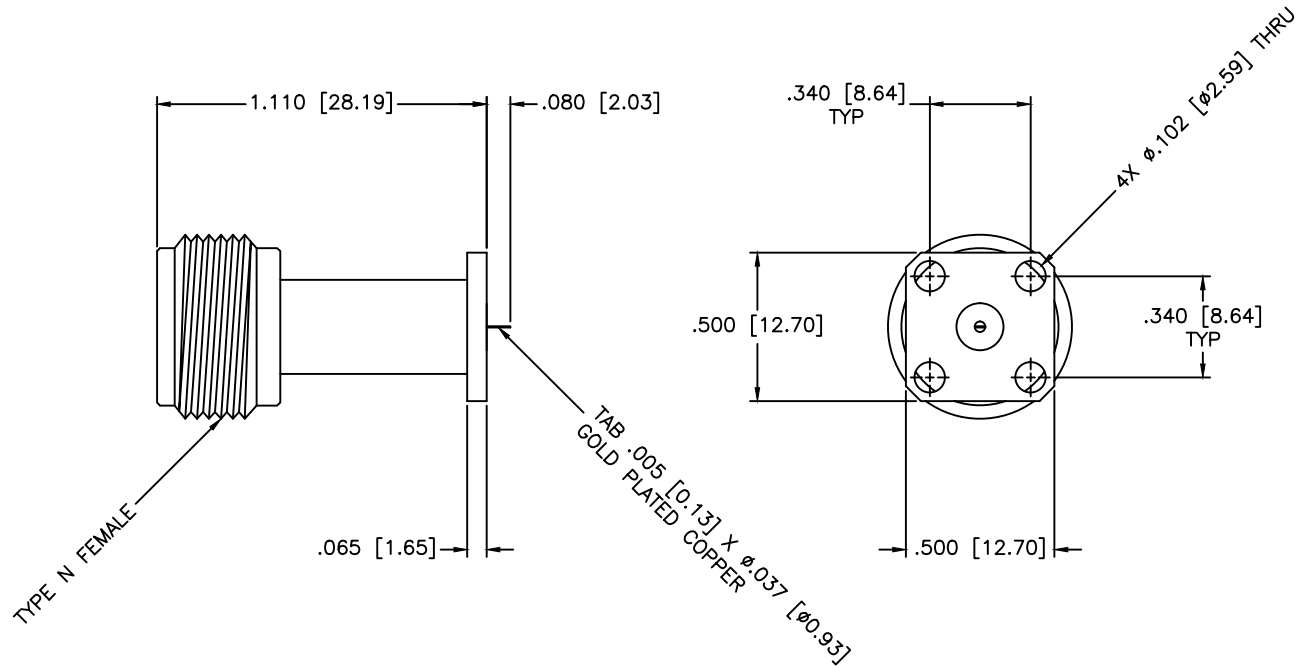

**SPECIFICATIONS**

Frequency Range: DC-11 GHz  
 VSWR: 1.18 Max.  
 Voltage Rating: 1,000 VRMS  
 Dielectric Withstanding Voltage: 2,500 VRMS Min.  
 Impedance: 50 OHMS  
 Temperature Range: -55°C to +85°C

**MATERIAL & FINISHING**

Shell: Brass, Nickel plated  
 Contact: Copper, Gold plated  
 Insulator: PTFE Teflon

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:	TYPE N FEMALE CONNECTOR, LONGNECK
DRAWN: Paiboon Luethamhan	DATE: 12-03-2001	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.:	MC18-230
APPROVED: T. Nguyen	DATE: 12-03-2001	THIRD ANGLE PROJECTION 	CAGE CODE:	OD2L5
		SIZE: N/A REV: N/A DWG NO.: 82355	DO NOT SCALE THE DRAWING	