


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

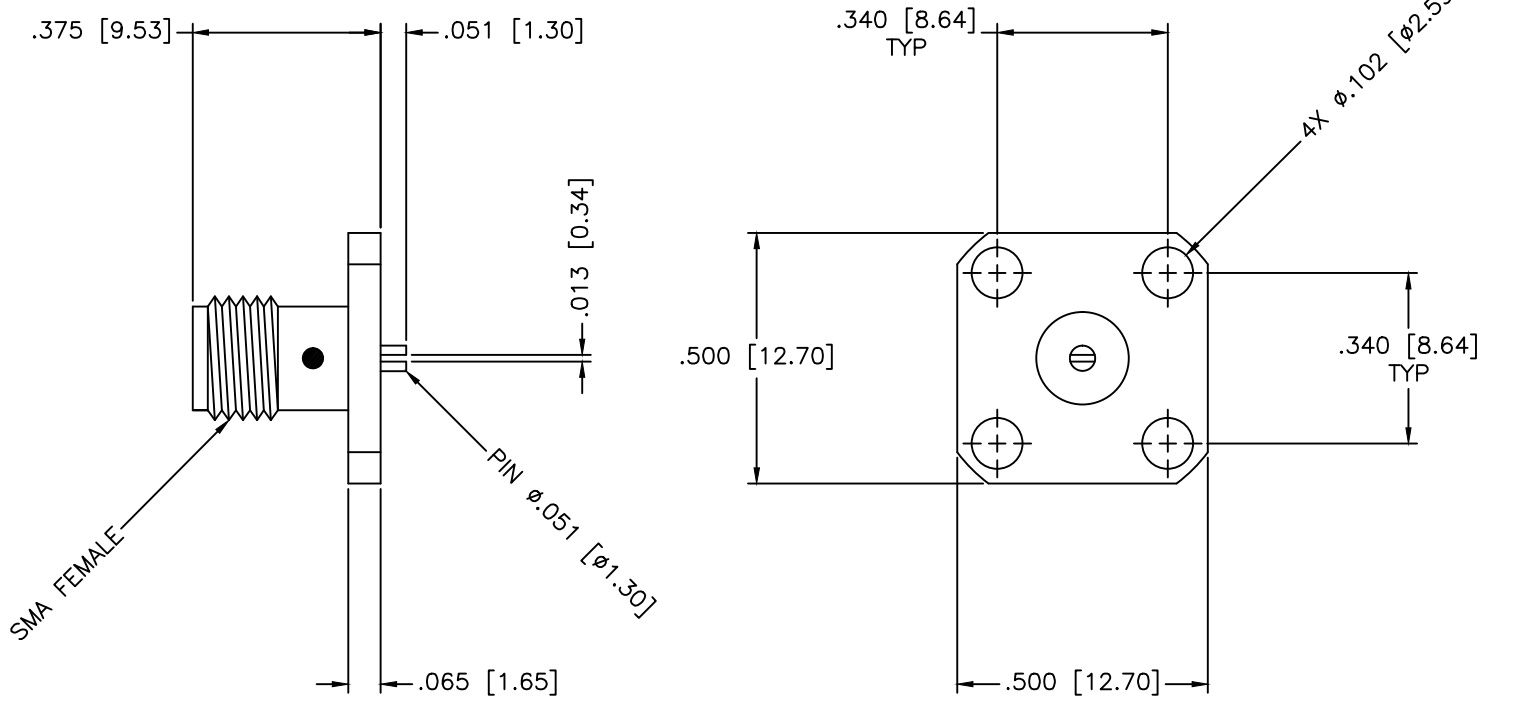

SPECIFICATIONS

Frequency Range: DC-18 GHz
 VSWR: 1.10 Max.
 Impedance: 50 OHMS
 Temperature Range: -55°C to +85°C

MATERIAL & FINISHING

Shell: Stainless Steel, Passivated
 Contact: Copper, Gold Plated
 Insulator: PTFE Teflon

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A
DRAWING TITLE:			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°		DRAWING TITLE: SMA FEMALE CONNECTOR, SLOTTED PIN		
DRAWN: Paiboon Luekhamhan		PART NO. MC18-410		
DATE: 10-05-2009		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		SIZE: N/A REV: N/A DWG NO.: 84596		
DATE: 10-05-2009		DO NOT SCALE THE DRAWING		