


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

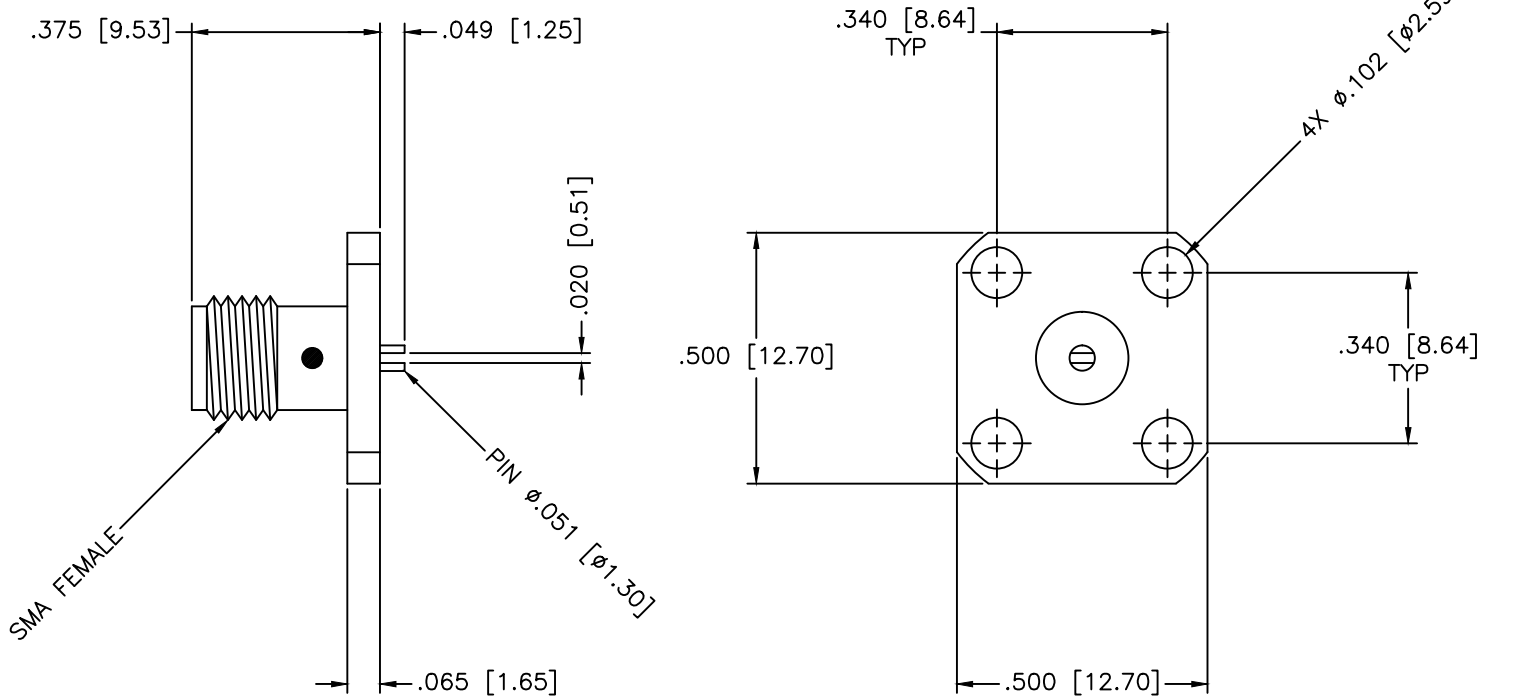

SPECIFICATIONS

Frequency Range: DC-18 GHz
 VSWR: 1.10 Max.
 Impedance: 50 OHMS
 Temperature Range: -55°C to +85°C

MATERIAL & FINISHING

Shell: Stainless Steel, Passivated
 Contact: Copper, Gold Plated
 Insulator: PTFE Teflon

MATERIAL: (Blank area)		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET:	N/A
DRAWING TITLE: SMA FEMALE CONNECTOR, SLOTTED PIN		PART NO. MC18-440			
DRAWN: Paiboon Luekhamhan	DATE: 10-16-2009	PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:	OD2L5
APPROVED: T. Nguyen	DATE: 10-16-2009	THIRD ANGLE PROJECTION		SIZE:	N/A
				REV:	N/A
				DO NOT SCALE THE DRAWING	
				DWG. NO. 84605	