


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

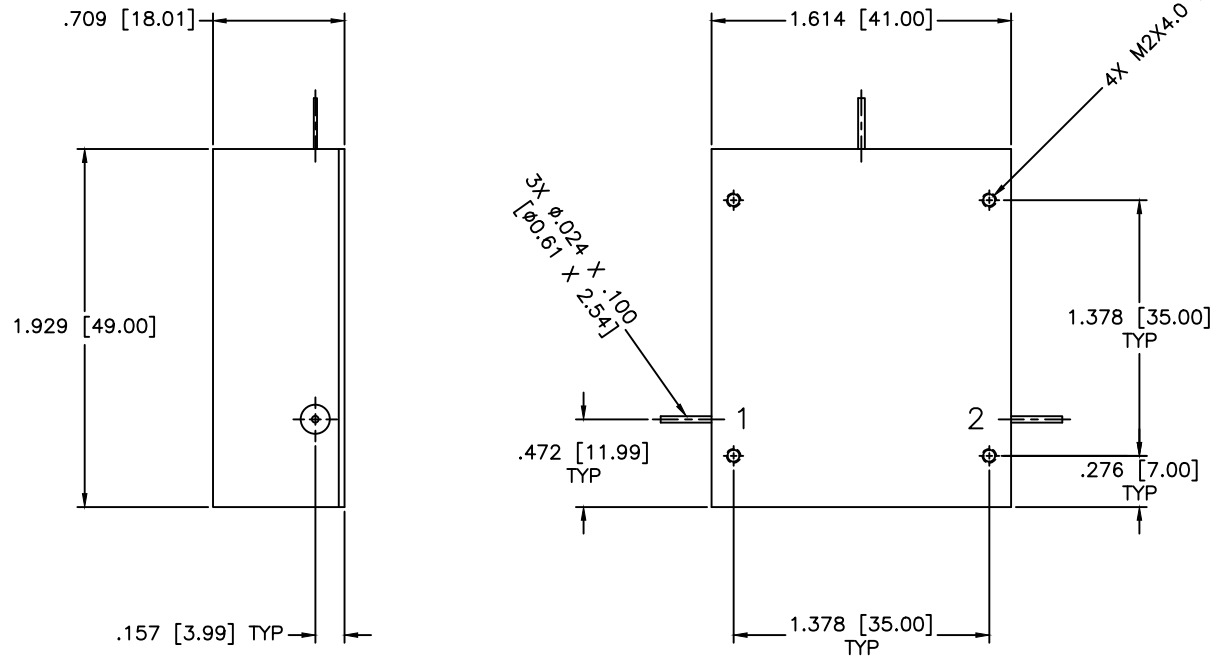

SPECIFICATIONS

Frequency Range: 470–862 MHz
 Reverse Isolation: 15dB Min.
 Insertion loss: 1.20dB Max.
 VSWR: 1.50:1 Max.
 Forward Power: 15 Watts
 Operating Temperature: -40°C to +70°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	LUMPED ELEMENT COAXIAL CIRCULATOR	
DRAWN: Paiboon Luekhamhan		DATE: 08-03-2011	PART NO. ML-8	
APPROVED: T. Nguyen		DATE: 08-03-2011	CAGE CODE: OD2L5	SIZE: A
			REV: N/A	DWG NO. 85800
			DO NOT SCALE THE DRAWING	