


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

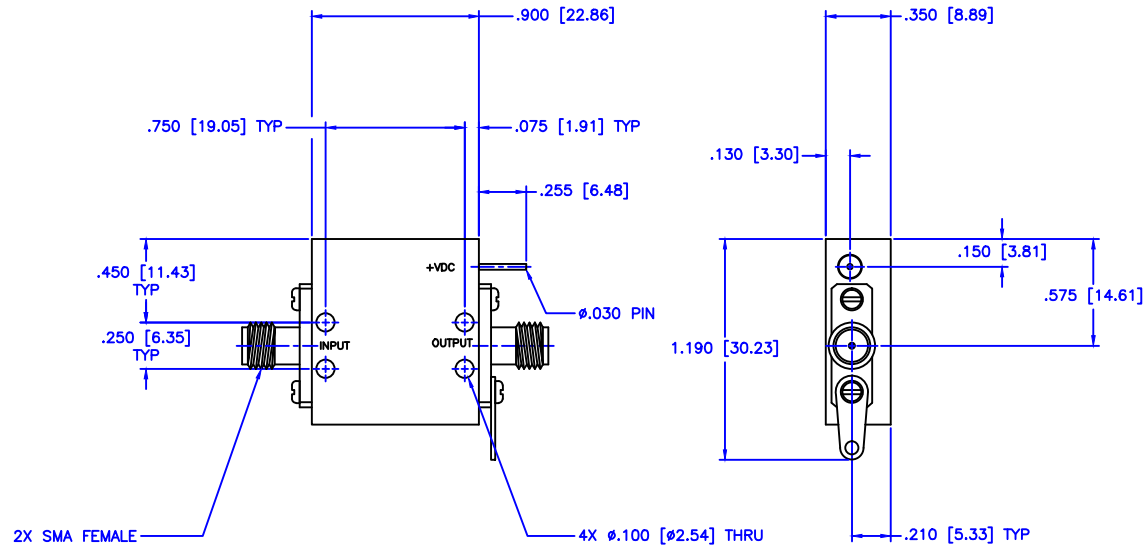

SPECIFICATIONS

Frequency Range: 10.7–11.7 GHz  
Gain: 20dB Min.  
Gain Flatness: ±1.0dB Max.  
VSWR In/Out: 2.00:1 Max.  
DC Power Voltage: +12 Vdc  
DC Power Amps: 1

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SHEET:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	RF AMPLIFIER
DRAWN:		DATE:		PART NO.		
Paiboon Luekhamhan		01-29-2009		PA-9		
APPROVED:		DATE:		CAGE CODE:	SIZE:	REV:
T. Nguyen		01-29-2009		OD2L5	A	N/A
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DWG NO.		84079
		THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING		