


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

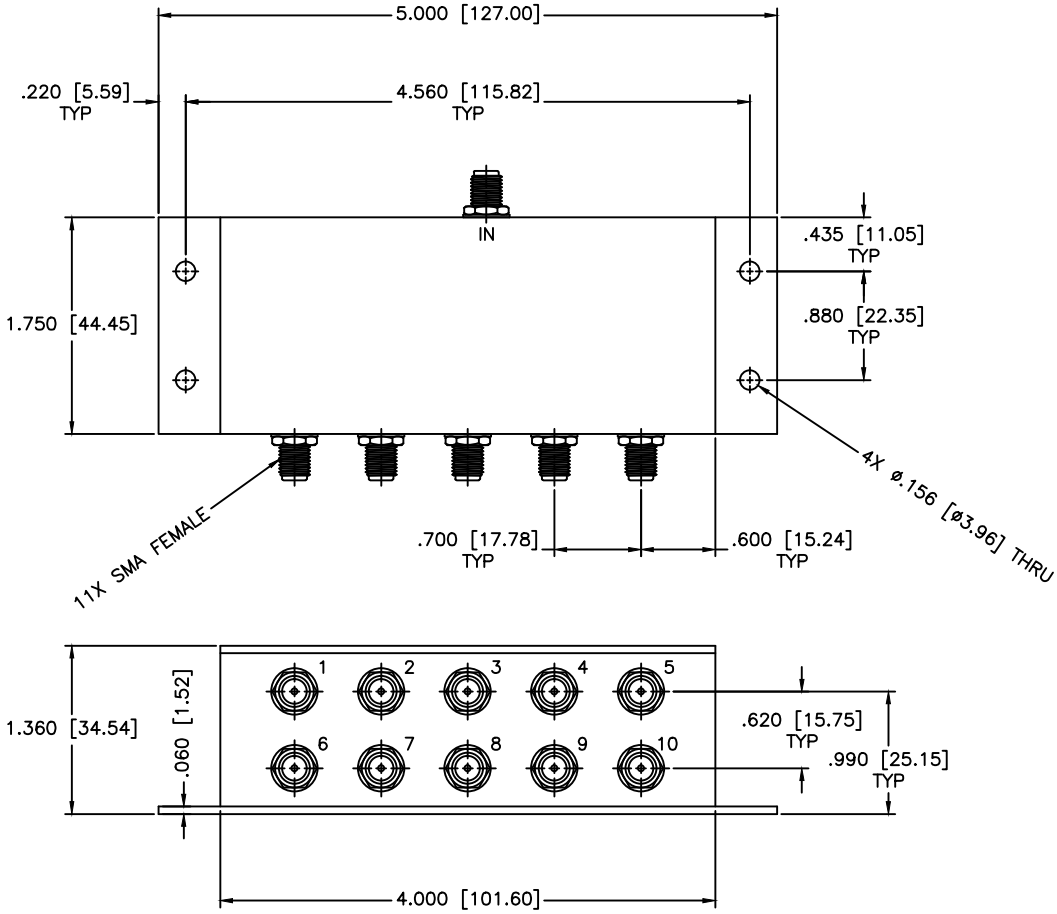

SPECIFICATIONS

FREQUENCY RANGE:	5-200 MHz		
BANDS:	LB	MB	UB
ISOLATION (dB) TYP/MIN:	25/20	32/25	25/20
INSERTION LOSS (dB) TYP/MAX:	0.7/1.2	0.9/1.1	1.2/1.5
PHASE BALANCE (Max.):	4 Deg.	6 Deg.	8 Deg.
AMPLITUDE BALANCE (Max.):	0.5dB	0.6dB	0.8dB

MATERIAL:

DRAWN: **Paiboon Luekhamhan** DATE: 09-30-2008

APPROVED: **T. Nguyen** DATE: 09-30-2008

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
http://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

PROPERTY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

SCALE: N/A
SHEET: N/A

DRAWING TITLE: **10-WAY POWER DIVIDER**

PART NO.: **PL10-1**

CAGE CODE: **OD2L5** SIZE: N/A REV: N/A DWG. NO.: **83923**

DO NOT SCALE THE DRAWING