


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

5x ϕ .136 [03.45] THRU

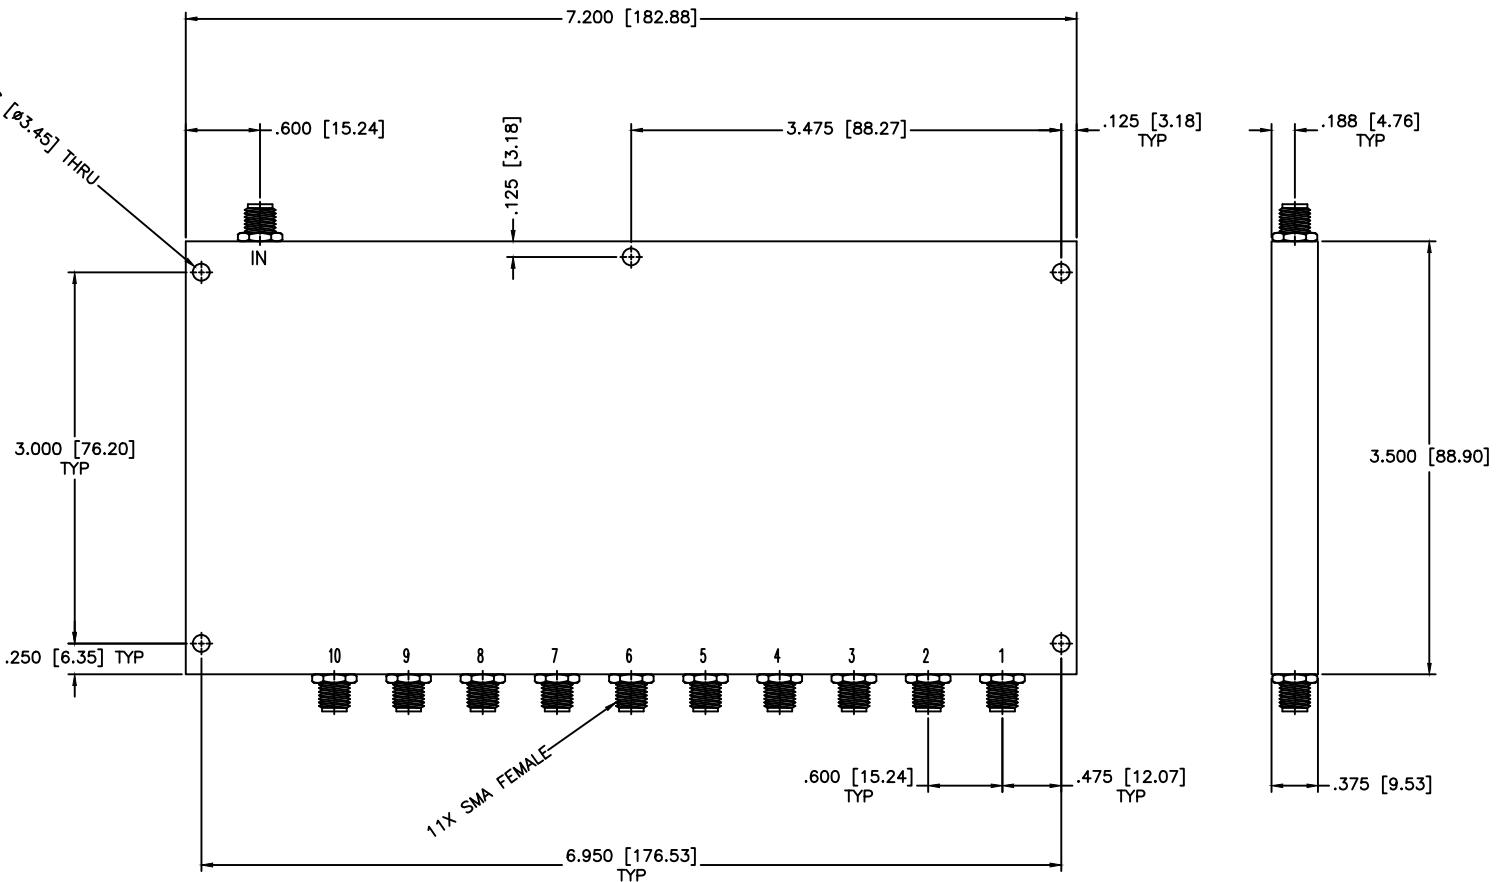

PERFORMANCE

FREQUENCY RANGE 250-650 MHz
 IMPEDANCE 50 OHMS NOMINAL
 ISOLATION (OUTPUT PORTS) 16dB min.
 INPUT POWER 500MW Max.
 VSWR 1.50:1 Max.
 AMPLITUDE BALANCE \pm 1.2dB Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-0118 http://www.mcli.com		SCALE: N/A
DRAWING TITLE:				10-WAY POWER DIVIDER
DRAWING: Paiboon Luekhamthorn		DATE: 08-01-2003		PART NO. PL10-37
APPROVED: T. Nguyen		DATE: 08-01-2003		CAGE CODE: OD2L5
UNLESS OTHERWISE SPECIFIED: TOLERANCES: IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: \pm 1/64 DECIMALS: \pm .01 \pm .005 ANGLE: \pm 1/2°		SIZE: N/A	REV: N/A	DWG NO. XXXXX
THE INFORMATION ON THIS DRAWING IS PROPERTY OF MCLI AND IS TO BE KEPT IN CONFIDENTIAL STATUS UNLESS OTHERWISE SPECIFIED BY MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING		