


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

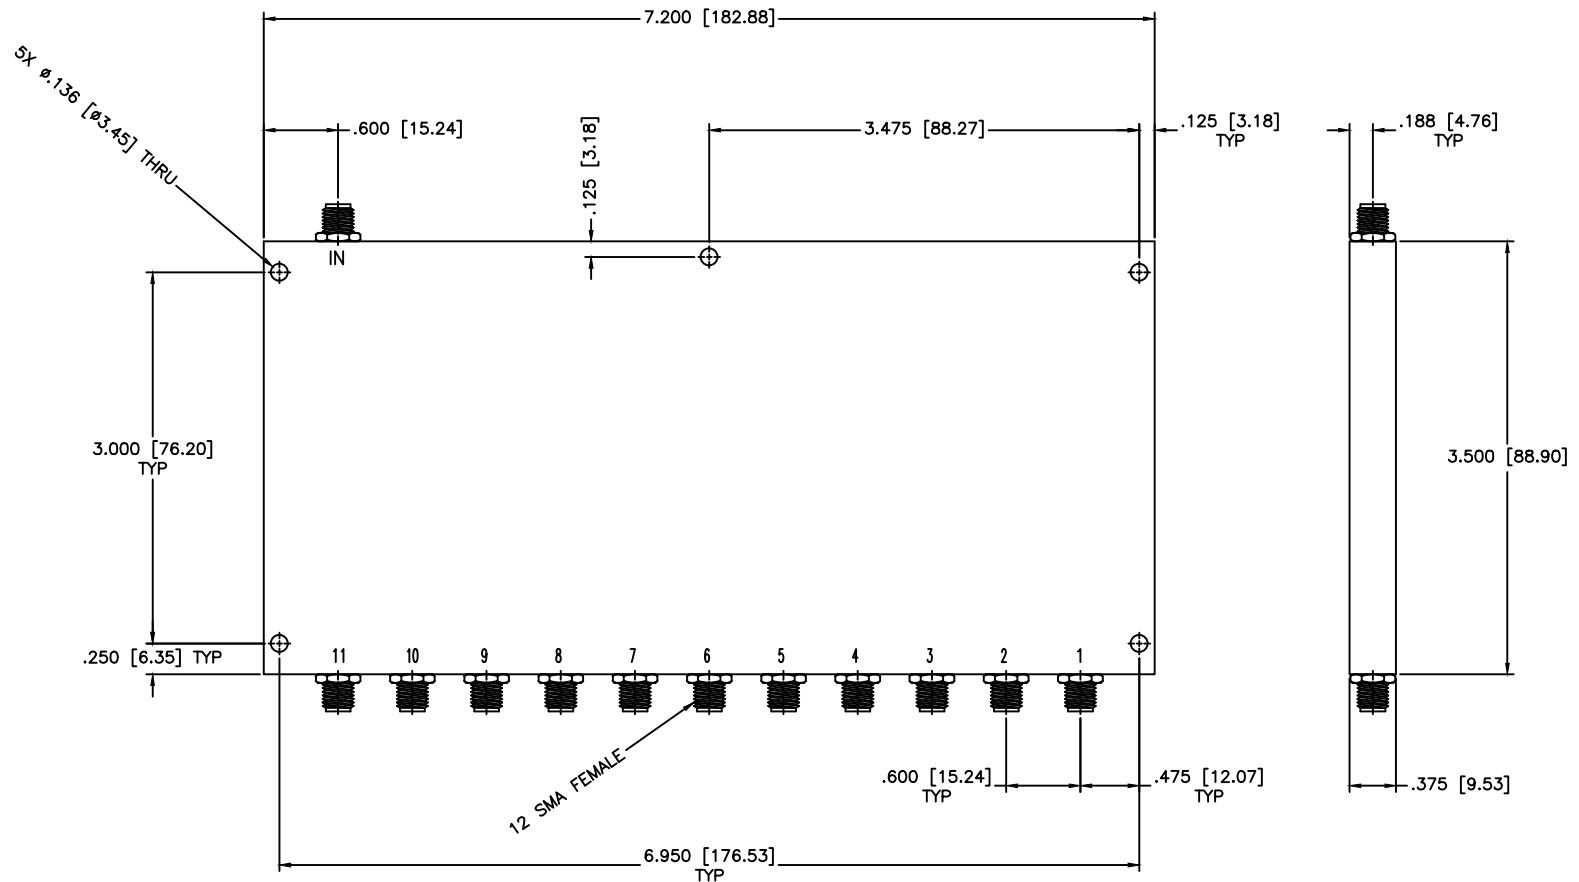

PERFORMANCE

FREQUENCY RANGE 490-510 MHz
 IMPEDANCE 50 OHMS NOMINAL
 ISOLATION (OUTPUT PORTS) 18.5dB min.
 INPUT POWER 500MW Max.
 VSWR 1.50:1 Max.
 AMPLITUDE BALANCE ±1.0dB Max.

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-0118 http://www.mcli.com		SCALE: N/A
DRAWING TITLE:		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°		DRAWING TITLE: 11-WAY POWER DIVIDER		SHEET: N/A
PART NO.:		DRAWING NO. 0D2L5		PART NO. PL11-23/S		DWG NO. 82332
DRAWING:		DATE: 08-01-2003 DRAWN BY: Paiboon Luekhamthorn		DATE: 08-01-2003 APPROVED BY: T. Nguyen		SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING