


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

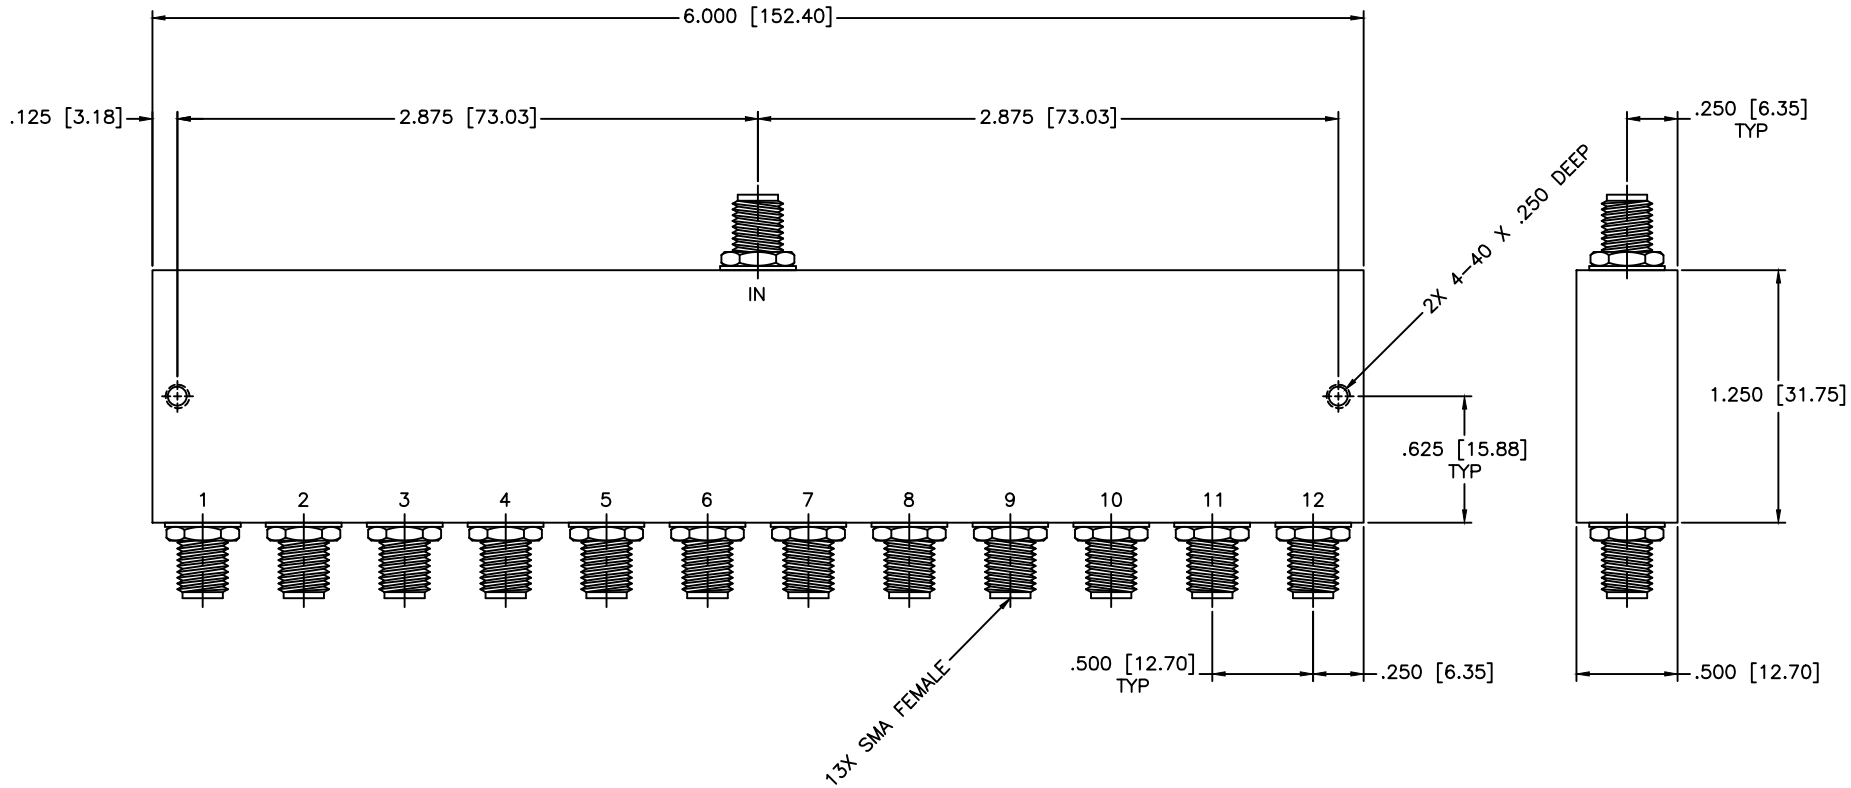

SPECIFICATIONS

Frequency Range: 1–500 MHz
 Insertion Loss: 2.0dB Max.
 Isolation: 20dB Min.
 VSWR: 1.50:1 Max.
 Amplitude Balance: ± 0.5 dB Max.
 Phase Balance: ± 5 Deg. Max.
 Power: 1 Watt Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 12-WAY POWER DIVIDER	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.: PL12-12	
DRAWN: Paiboon	DATE: 07-25-2018	CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO.: 86758
APPROVED: T. Nguyen	DATE: 07-25-2018	DO NOT SCALE THE DRAWING	