


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

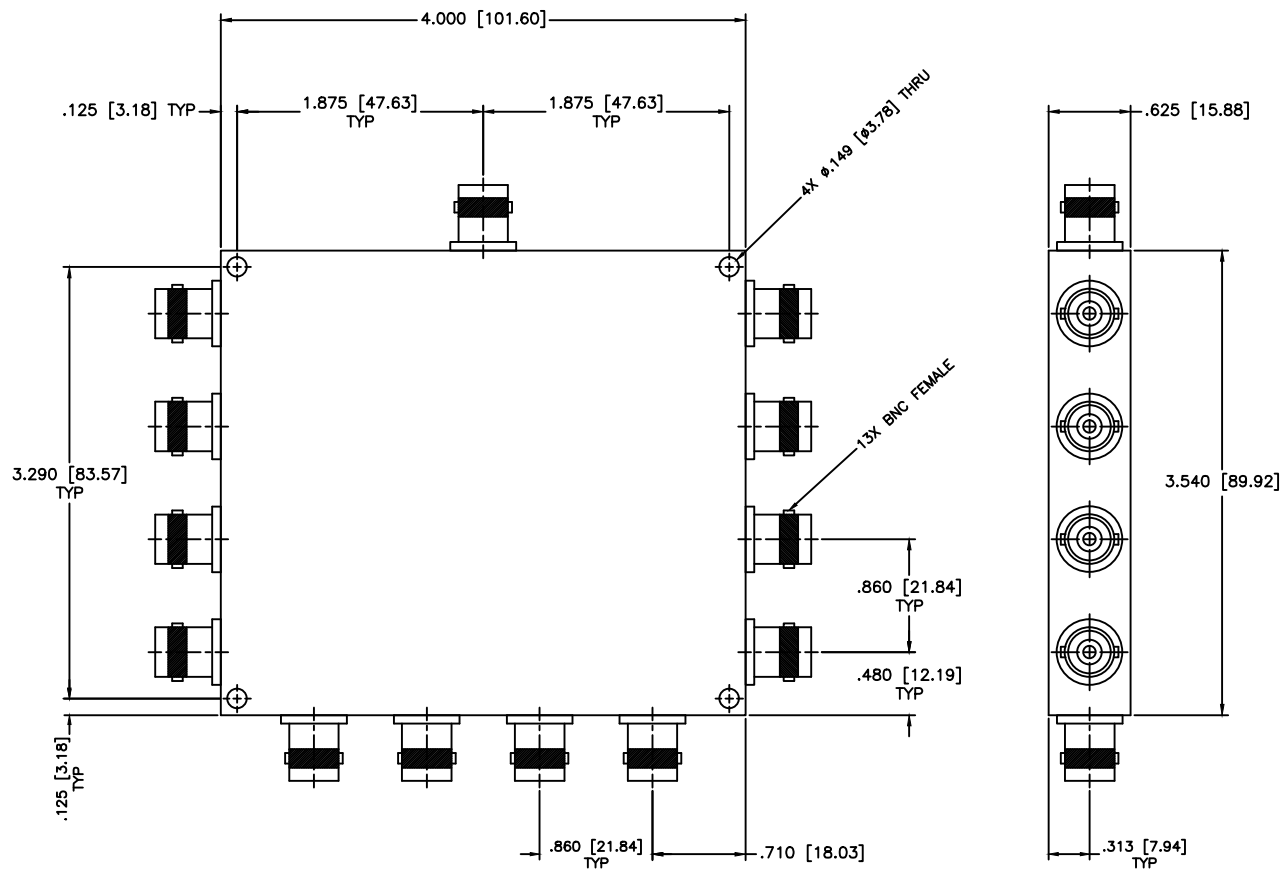

SPECIFICATIONS

Frequency Range: 50–1000 MHz
 Insertion Loss: 14dB Max.
 Isolation: 14dB Min.
 Amplitude Balance: ± 1.4 dB Max.
 VSWR: 1.20:1 Typ.
 Phase Balance: ± 23 Deg. Max.
 Power: 0.5 Watt

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8254 FAX: (727) 361-6116 http://WWW.MCLI.COM		SCALE: N/A	
DRAWN: Poiboon Luethamhan		DATE: 04-28-2010		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 12-WAY POWER DIVIDERS	
APPROVED: T. Nguyen		DATE: 04-28-2010		PART NO. PL12-19/BF CAGE CODE: OD2L5 SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING		SHEET: N/A	
		PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		DWG NO. 84769	