



REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

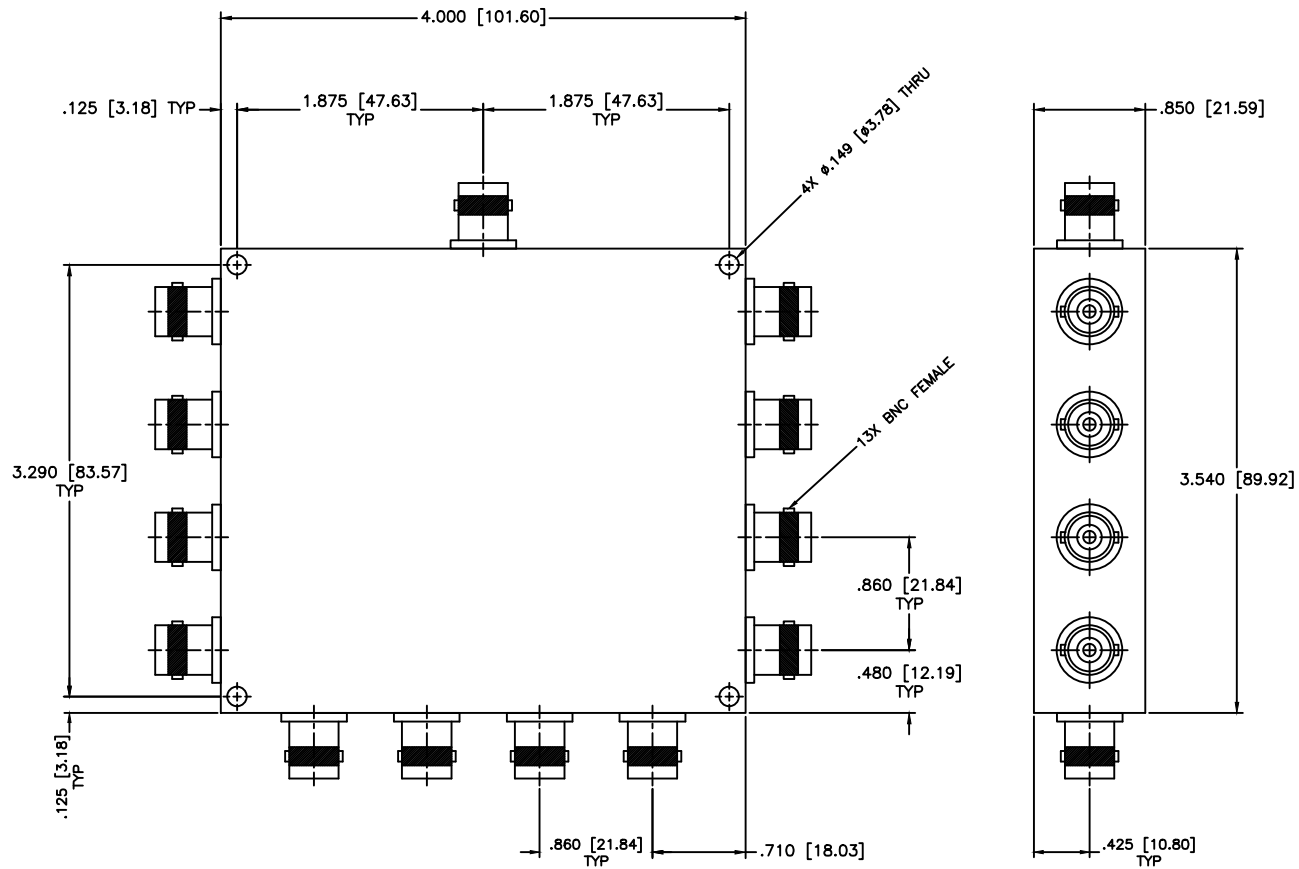

**SPECIFICATIONS**

Frequency Range: 20–500 MHz  
 Insertion Loss: 1.7dB Max.  
 Isolation: 25dB Min.  
 Amplitude Balance:  $\pm 0.3$ dB Max.  
 VSWR In/Out: 1.40:1/1.40:1  
 Phase Balance:  $\pm 4$  Deg. Max.  
 Power: 1 Watt

MATERIAL:		 <b>MICROWAVE COMMUNICATIONS LABORATORIES INC.</b> 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8254 FAX: (727) 361-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>		SCALE: N/A
DRAWN: Poiboon Luekhamhan		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DATE: 05-17-2001		DRAWING TITLE: 12-WAY POWER DIVIDERS		
APPROVED: T. Nguyen		PART NO. PL12-2/BF		
DATE: 05-17-2001		CAGE CODE: OD2L5		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING		DWG NO. 81752