


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

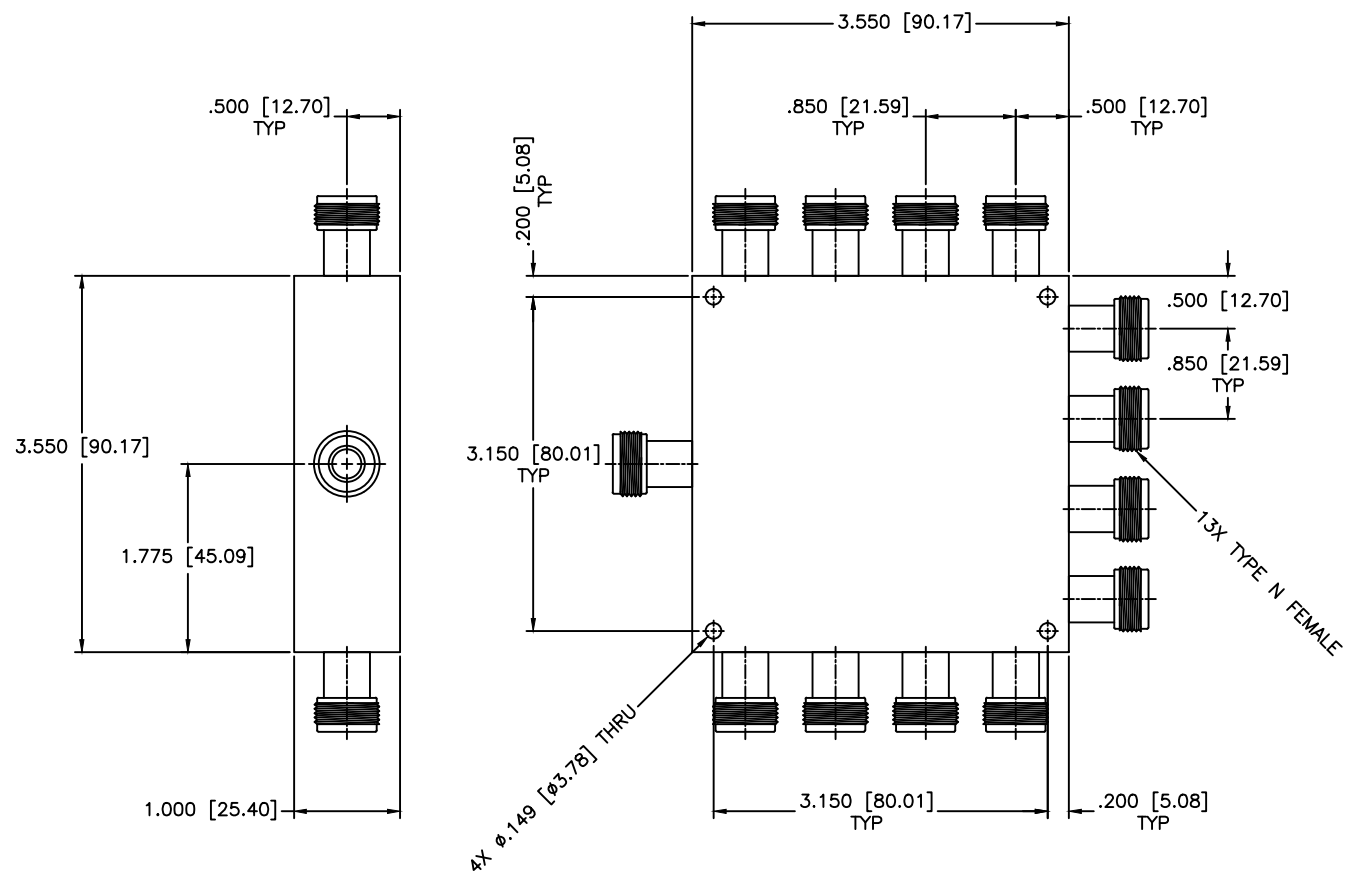

**SPECIFICATIONS**

- Frequency Range: 500–1500 MHz
- Insertion Loss: 3.5dB Max.
- Isolation: 20dB Min.
- Amplitude Balance:  $\pm 0.6$ dB Max.
- VSWR: 1.40:1 Max.
- Phase Balance:  $\pm 9$  Deg. Max.
- Power: 1 Watt Max.

MATERIAL:	DRAWING: Paiboon Luethamhan	DATE: 11-06-1997	<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-0110 http://WWW.MCLI.COM	SCALE: N/A
				SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$	DRAWING TITLE: 12-WAY POWER DIVIDER			
	PART NO.: PL12-4/NF			
APPROVED: T. Nguyen	DATE: 11-06-1997	THE INFORMATION ON THIS DRAWING IS PROPERTY OF MCLI AND IS TO BE KEPT IN CONFIDENTIAL STATUS UNLESS OTHERWISE SPECIFIED BY MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE: OD2L5	SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING
			DWG NO.: 80315	