


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

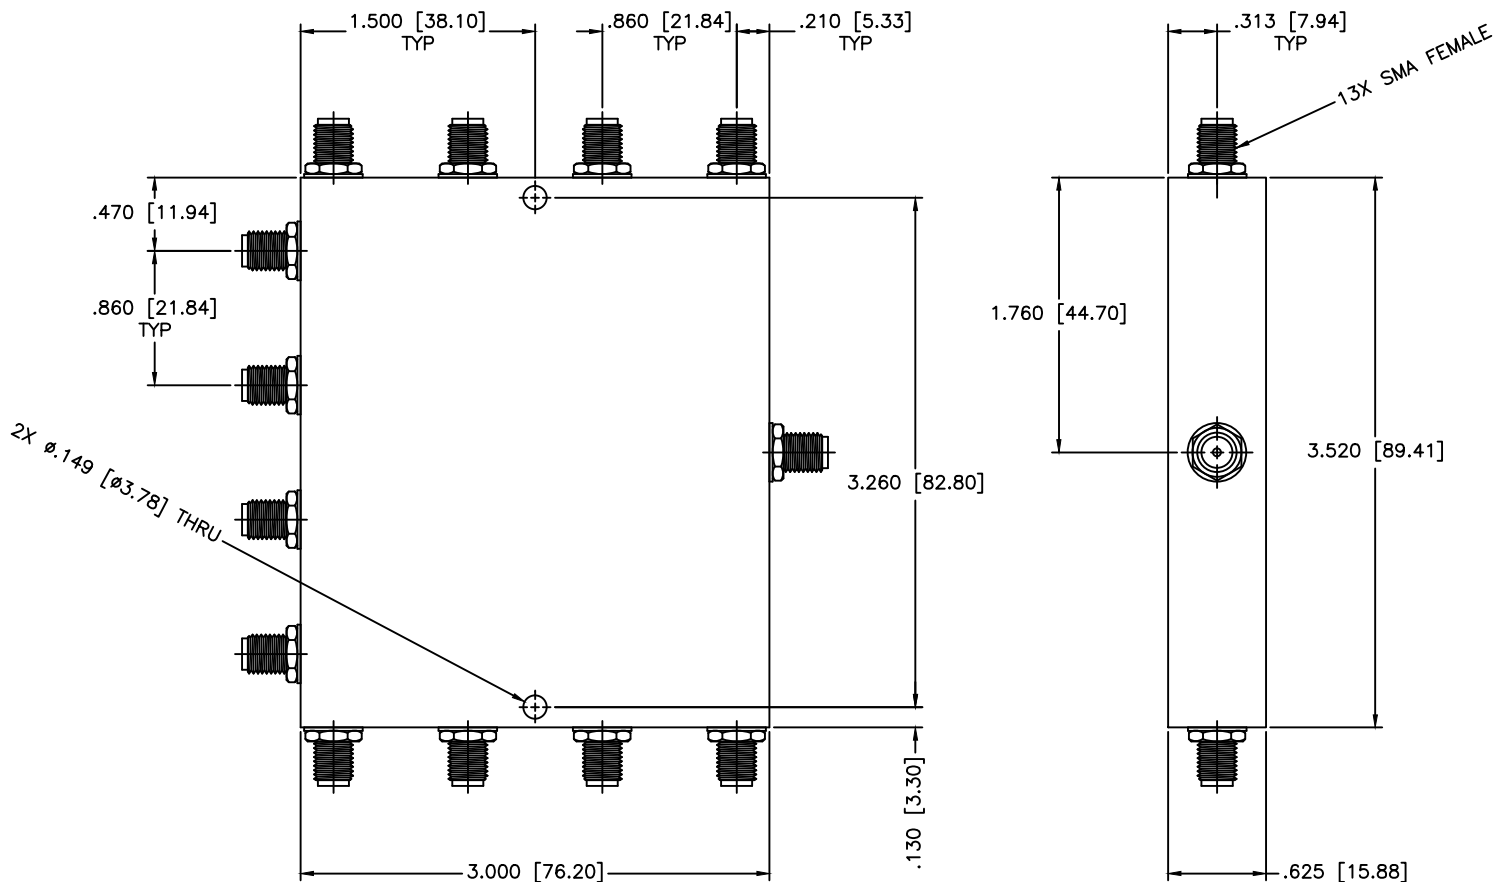

SPECIFICATIONS

- Frequency Range: 20–1500 MHz
- Insertion Loss: 3.6dB Max.
- Isolation: 20dB Min.
- Amplitude Balance: ±0.7dB Max.
- VSWR: 2.20:1 Max.
- Phase Balance: ±11 Deg. Max.
- Power: 1 Watt Max.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 05-17-2001
APPROVED: T. Nguyen	DATE: 05-17-2001

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 12-WAY POWER DIVIDER		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PL12-5		
THIRD ANGLE PROJECTION	CAGE CODE: OD2L5	SIZE: N/A	REV: N/A
	DO NOT SCALE THE DRAWING		DWG NO. 81964