


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

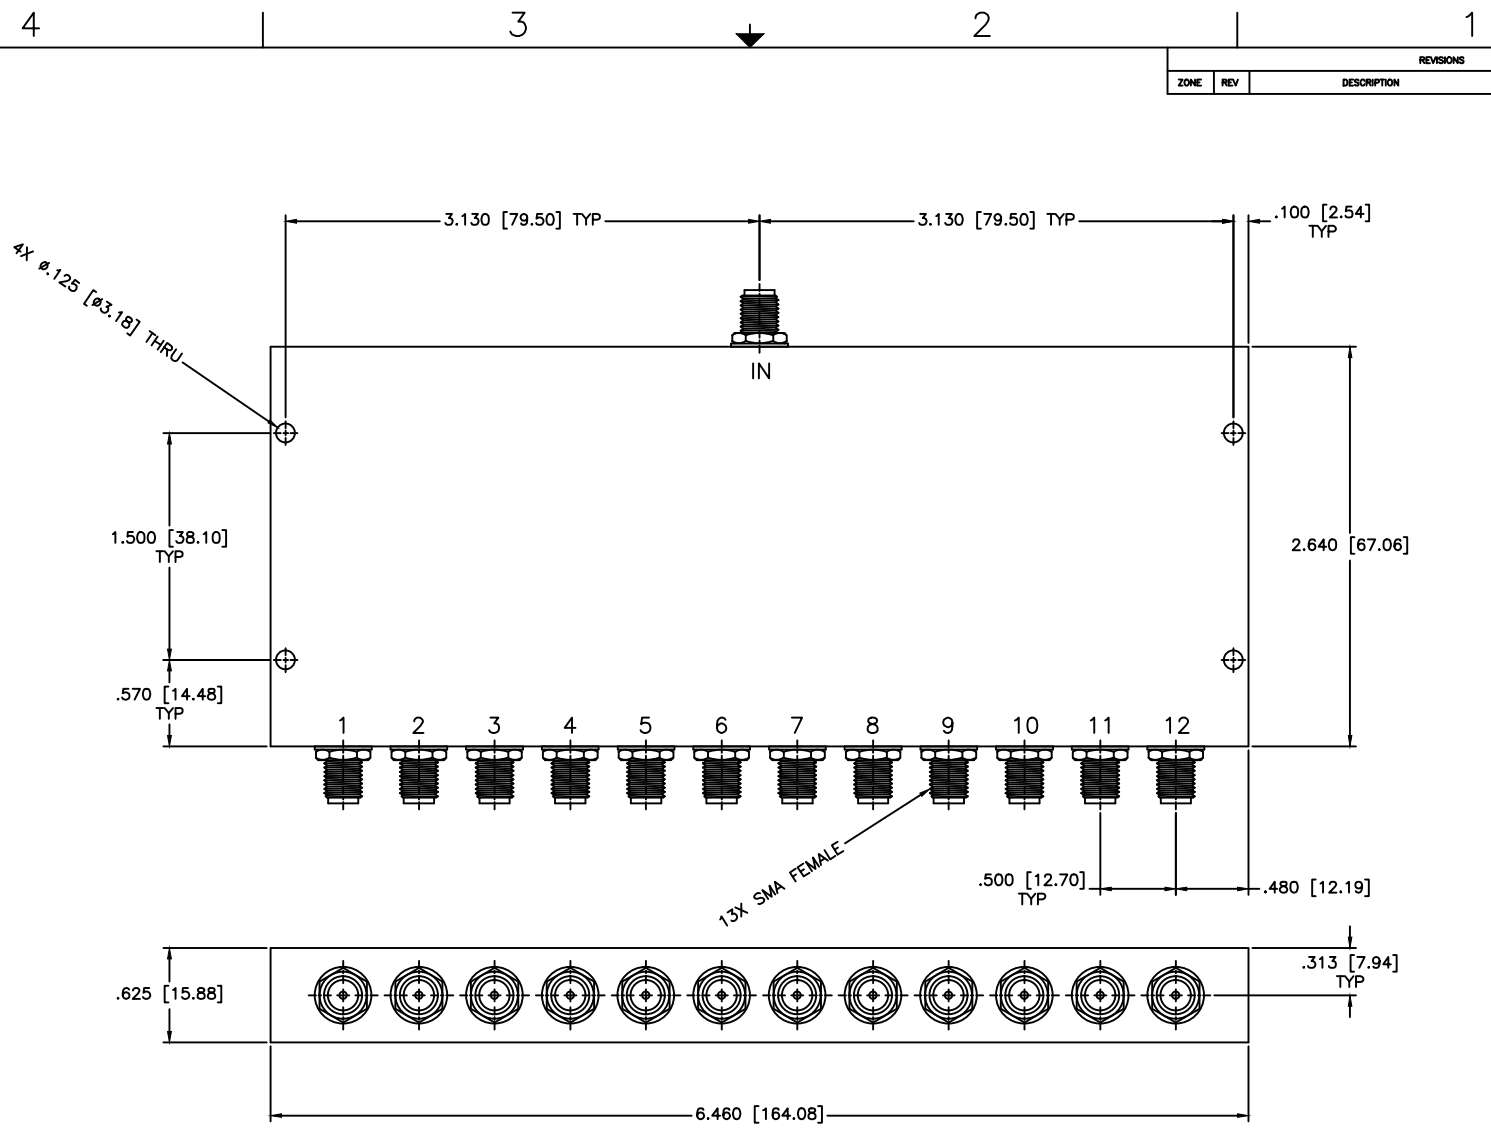

SPECIFICATION

Frequency Range: 50–500 MHz
 Insertion Loss: 12dB Max.
 Isolation: 16dB Min.
 VSWR: 1.25:1 Typ.
 Input Power: 0.5W Max.
 Amplitude Balance: ±0.7 Max.
 Phase Balance: ±10 Deg. Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES, INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-0110 http://WWW.MCLI.COM		SCALE: N/A
DRAWING TITLE:				SHEET: N/A
DRAWING: Paiboon Luekhamhan		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .02 ± .015 ANGLE: ± 1/2°		DRAWING TITLE: 12-WAY POWER DIVIDER
APPROVED: T. Nguyen		PART NO. PL12-6		DWG NO. 80311
DATE: 04-28-2010		DATE: 04-28-2010		CAGE CODE: OD2L5
DATE: 04-28-2010		DATE: 04-28-2010		SIZE: N/A REV: A
DATE: 04-28-2010		DATE: 04-28-2010		DO NOT SCALE THE DRAWING