


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

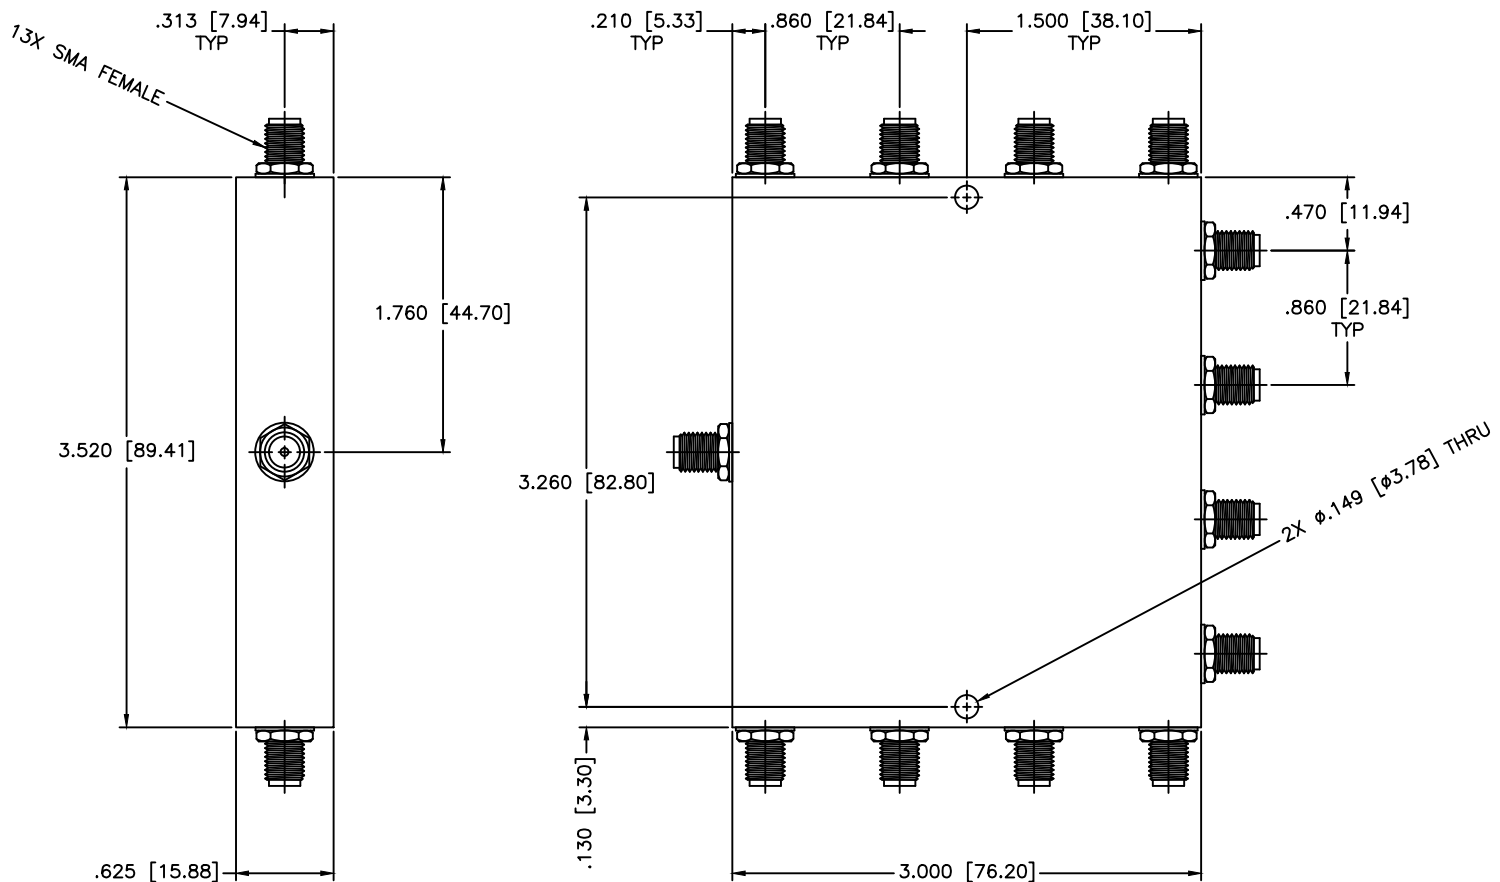

**SPECIFICATIONS**

- Frequency Range: 40–60 MHz
- Insertion Loss: 2.4dB Max.
- Isolation: 25dB Min.
- Amplitude Balance: ±0.4dB Max.
- VSWR: 1.40:1 Max.
- Phase Balance: ±8 Deg. Max.
- Power: 1 Watt Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
					SHEET:	N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:			12-WAY POWER DIVIDER
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.			PL12-9
DRAWN:	DATE:	THIRD ANGLE PROJECTION		CAGE CODE:	SIZE:	REV:	
Paiboon Luekhamhan	05-17-2001			OD2L5	N/A	N/A	
APPROVED:	DATE:			DO NOT SCALE THE DRAWING		DWG NO.	
T. Nguyen	05-17-2001					84640	