


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

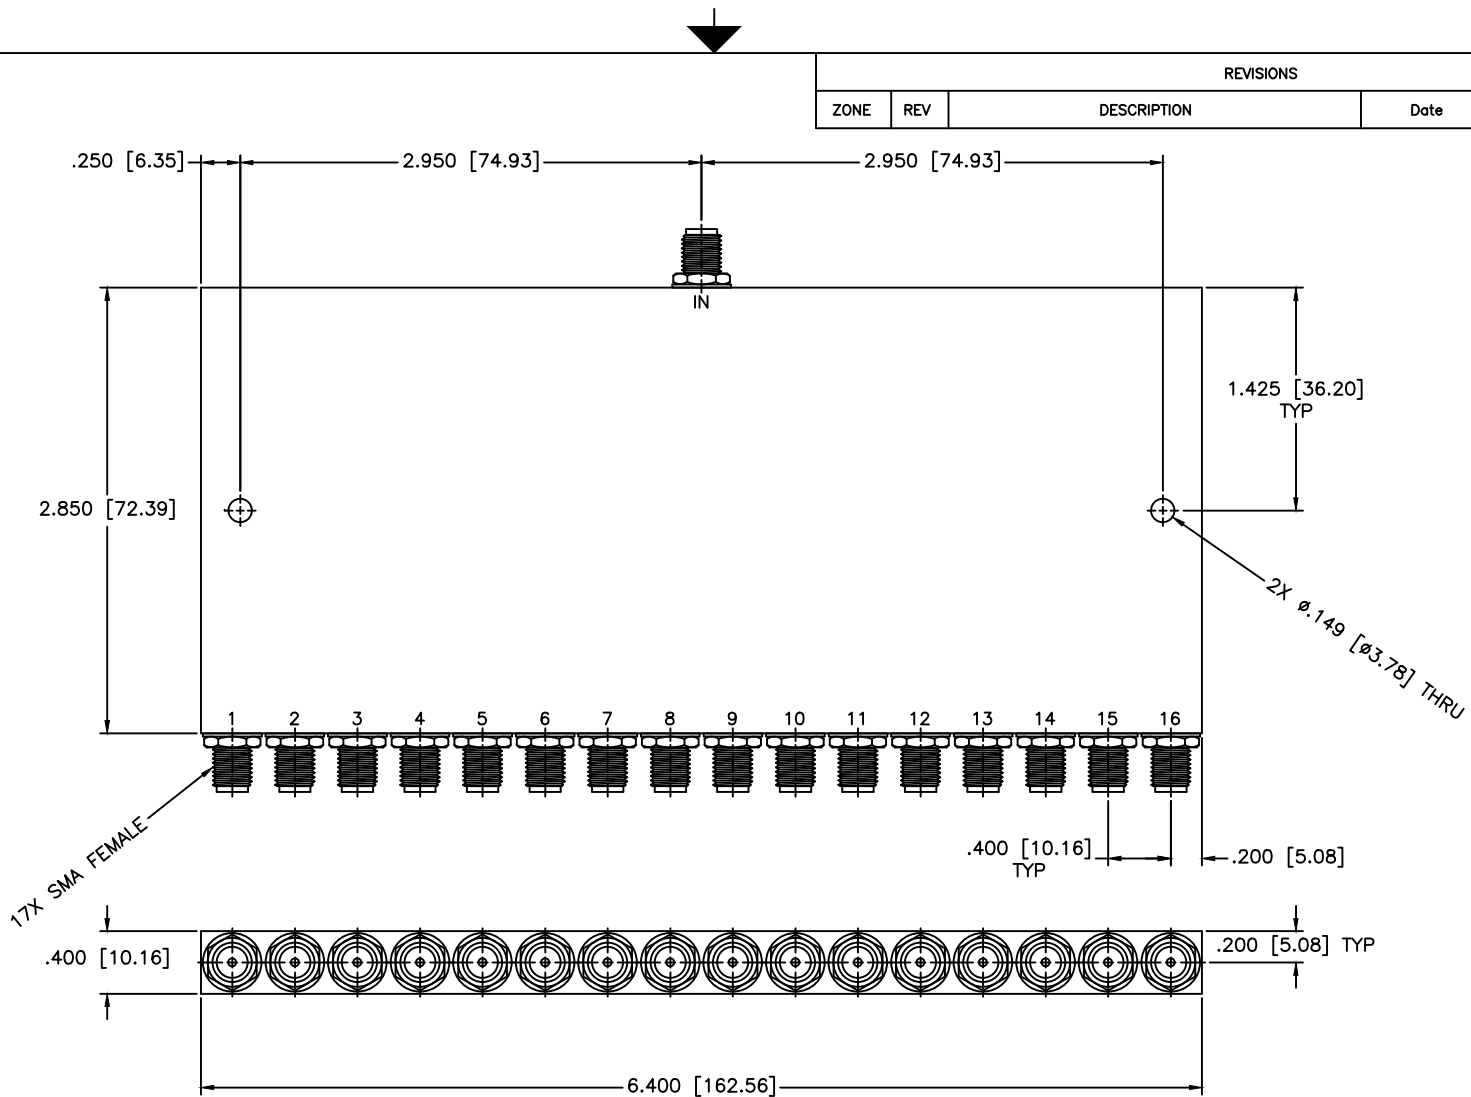

17X SMA FEMALE

SPECIFICATIONS

FREQUENCY RANGE: 1–100 MHz
 INSERTION LOSS: 1.4dB Max.
 VSWR: 1.40:1 Max.
 ISOLATION: 20dB Min.
 AMPLITUDE BALANCE: ± 0.5 dB Max.
 PHASE BALANCE: ± 8 Deg. Max.
 INPUT POWER: 1 Watt

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
DRAWING TITLE:			SHEET:	N/A
DRAWN: Paiboon Luekhamhan		DATE: 09-24-2007	16-WAY POWER DIVIDER	
APPROVED: T. Nguyen		DATE: 09-24-2007	PART NO. PL16-1	
THIRD ANGLE PROJECTION		CAGE CODE: OD2L5	SIZE: A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 85100