


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

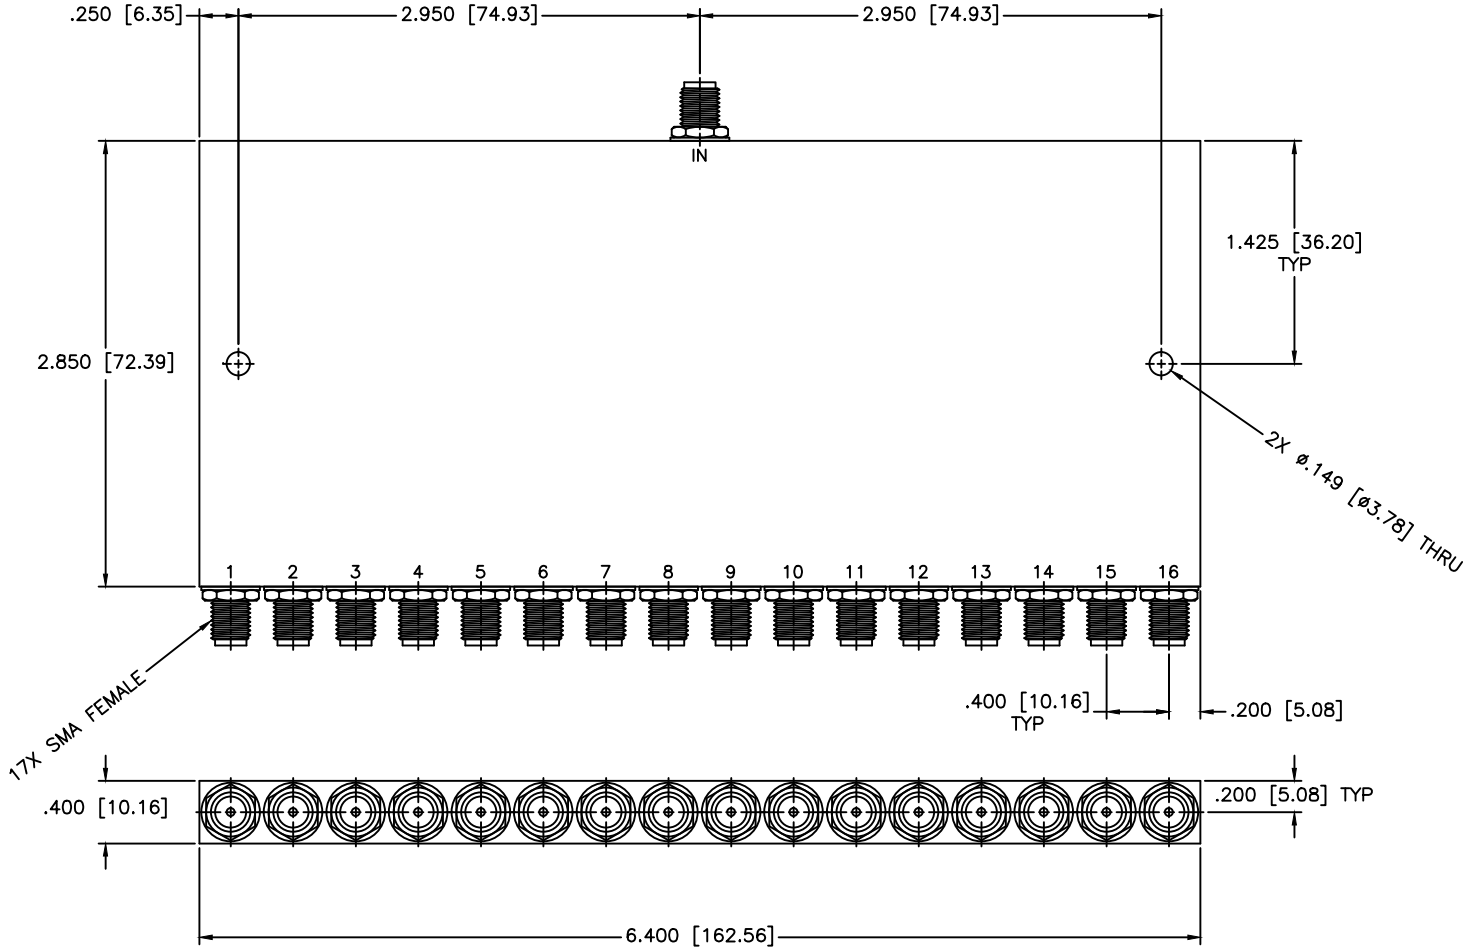

SPECIFICATIONS

FREQUENCY RANGE: 0.01–30 MHz
 INSERTION LOSS: 1.2dB Max.
 VSWR: 1.40:1 Max.
 ISOLATION: 25dB Min.
 AMPLITUDE BALANCE: ±0.2dB Max.
 PHASE BALANCE: ±3 Deg. Max.
 INPUT POWER: 1 Watt

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
DRAWN: Paiboon			DATE: 07-25-2018	SHEET:
APPROVED: T. Nguyen		DATE: 07-25-2018	DRAWING TITLE: 16-WAY POWER DIVIDER	
<small>UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±0.01 ±0.07 ANGLE: ±1/2°</small>		PART NO. PL16-10		
<small>PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>		CAGE CODE: OD2L5	SIZE: A	REV: N/A
<small>THIRD ANGLE PROJECTION</small>		DO NOT SCALE THE DRAWING		DWG NO. 86748