


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

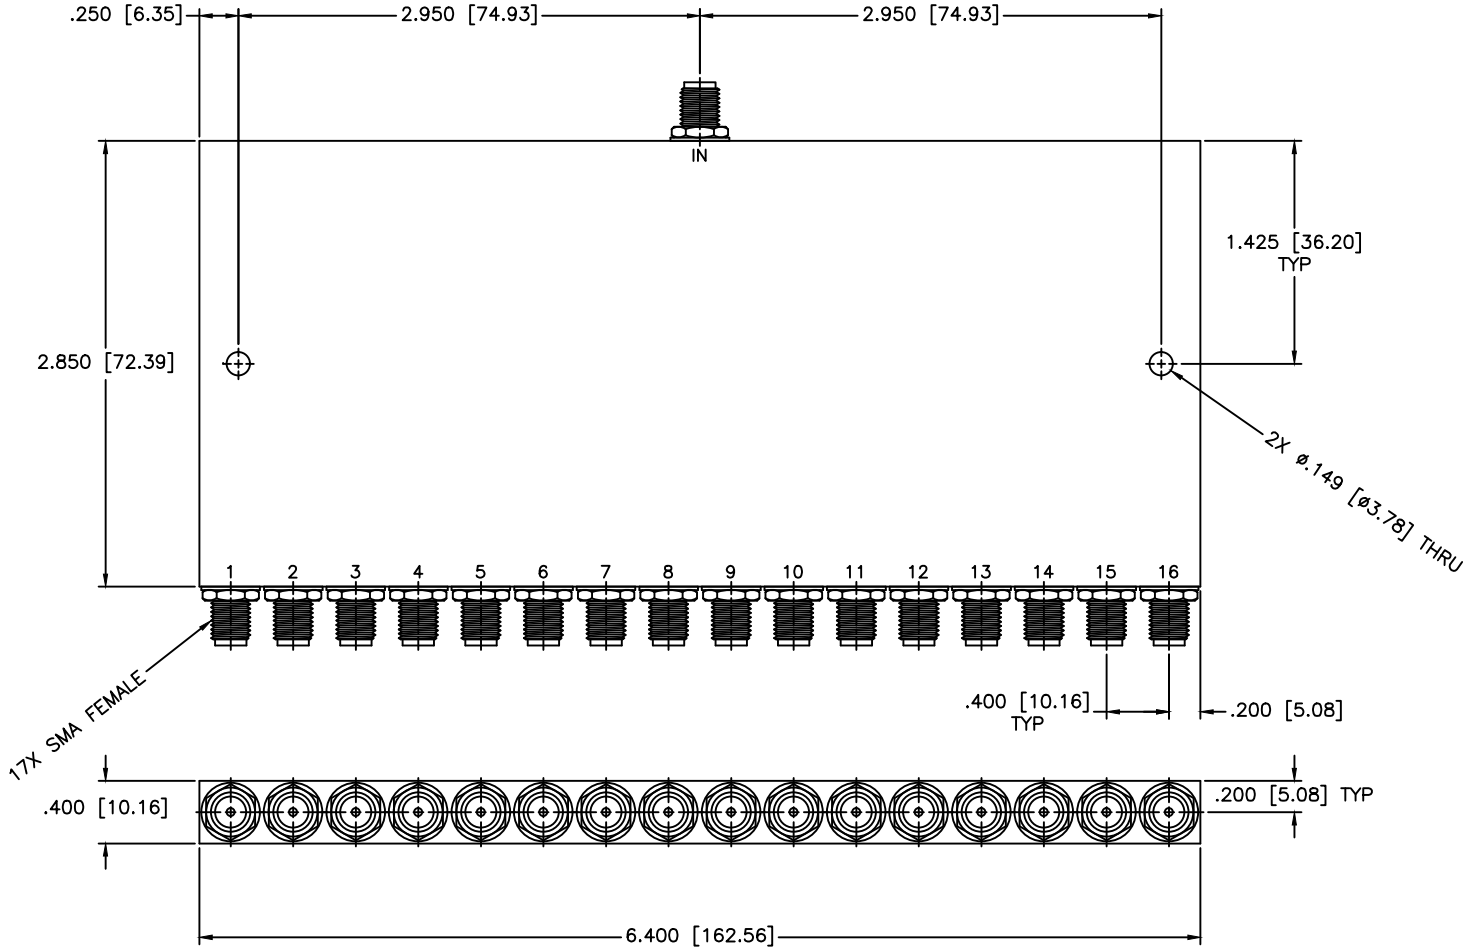

SPECIFICATIONS

FREQUENCY RANGE: 0.5–125 MHz
 INSERTION LOSS: 1.2dB Max.
 VSWR: 1.40:1 Max.
 ISOLATION: 20dB Min.
 AMPLITUDE BALANCE: ±0.3dB Max.
 PHASE BALANCE: ±5 Deg. Max.
 INPUT POWER: 1 Watt

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
DRAWN:		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±0.01 ±0.07 ANGLE: ±1/2°		DRAWING TITLE:		SHEET:	N/A
DATE:		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		16-WAY POWER DIVIDER		PART NO.:	
APPROVED:		THIRD ANGLE PROJECTION		PL16-11		CAGE CODE:	
T. Nguyen				OD2L5		SIZE:	
DATE:		DWG NO.		A		REV:	
07-25-2018		86749		N/A		DO NOT SCALE THE DRAWING	