


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

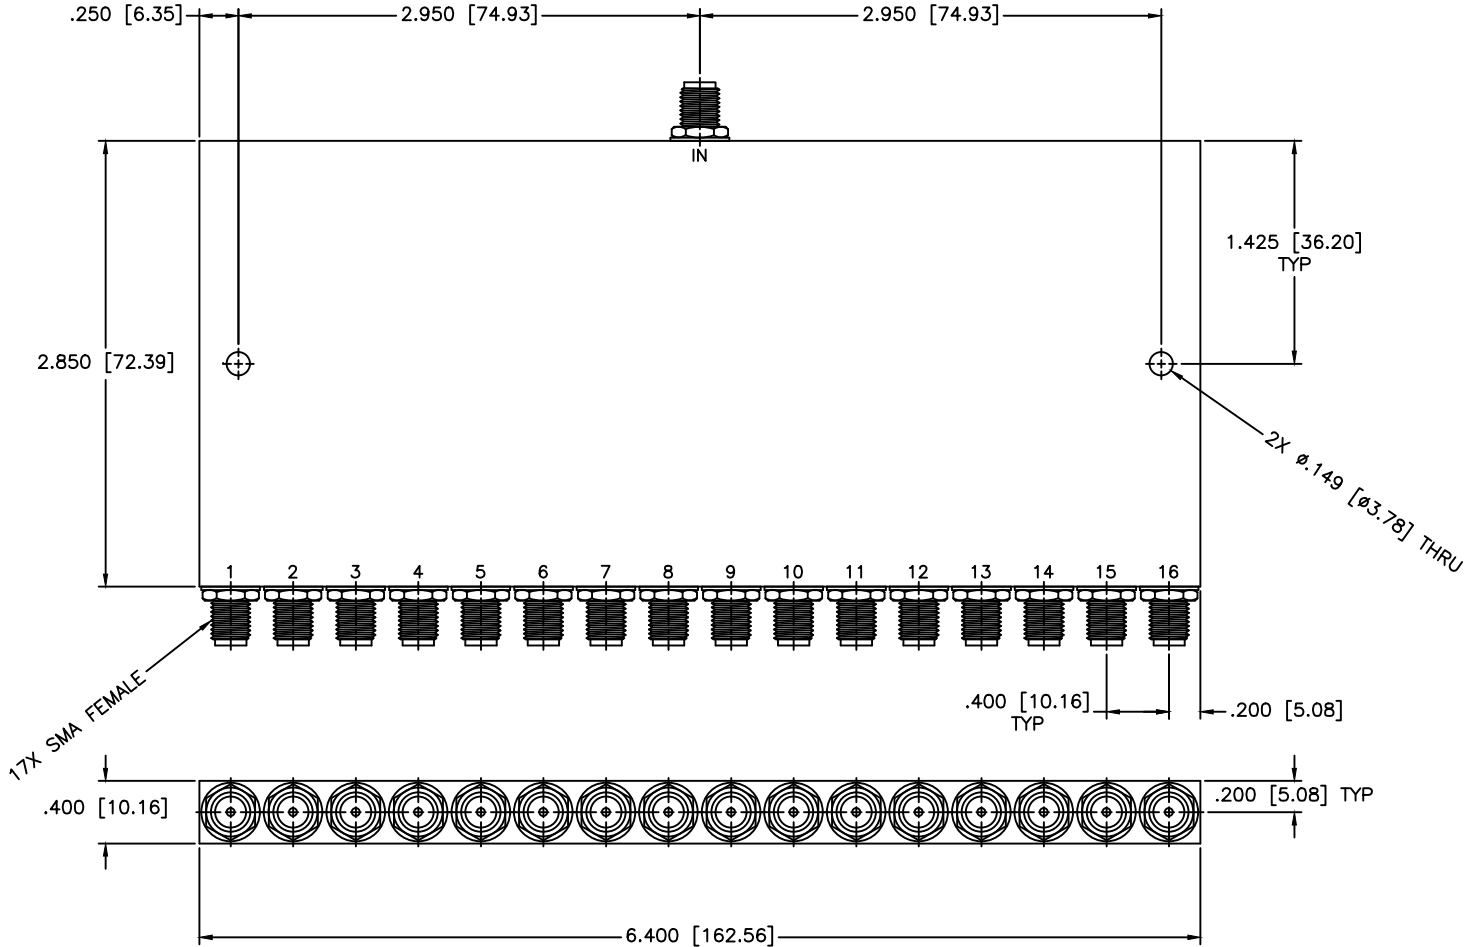

SPECIFICATIONS

FREQUENCY RANGE: 1-500 MHz
 INSERTION LOSS: 2.0dB Max.
 VSWR: 1.50:1 Max.
 ISOLATION: 20dB Min.
 AMPLITUDE BALANCE: ±0.6dB Max.
 PHASE BALANCE: ±10 Deg. Max.
 INPUT POWER: 1 Watt

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.007 ANGLE: ±1/2°		DRAWING TITLE:		16-WAY POWER DIVIDER		SHEET: N/A	
PART NO.:		PL16-12		CAGE CODE:		SIZE: A	
DRAWN: Paiboon		DATE: 07-25-2018		REV: N/A		DWG NO. 86750	
APPROVED: T. Nguyen		DATE: 07-25-2018		OD2L5		DO NOT SCALE THE DRAWING	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)							